

Industrial Gigabit Switch



① 1000Mbps Ports

GNT-IG1008GL-AC

IP40 Protection
Total 15W power supply
8 ports

Product Features


Aluminum shell for better heat dissipation , stable and durable
For extreme temperature environments: -40°C~70°C
Standard DIN-Rail mounting, fast in installation

Specifications

Ports	(1~8):10/100/1000Mbps ports (RJ45)
Transmission Rate	1000Mbps Full Duplex; 10 or 100 or 1000 Mbps Half Duplex
Transmission Distance	130m
Performance Specification	Bandwidth:16Gbps Network Latency (10 to 1000Mbps): $\leq 16\mu s$ (use the 64byte package size) MAC address table: 8K Packet forwarding rate: 11.9Mpps The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port;1488000pps the most for 1000M port
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control
Power Support	Power Input: AC 90~264V, Total $\leq 15W$
Protection Level	Protection Level:IP40, Lightning Protection:6KV, Per: IEC61000-4-5 ESD Protection:8KV, Per: IEC61000-4-2
Physical Specifications	Size(H*D*W): 145*110*51mm, Weight: 0.73KG/Pcs
Package	Size(L*W*H): 400*360*300mm(CTN Box); 24Pcs/CTN
Working Environment	Operating Temperature: -40°C~70°C Storage Temperature: -40°C~70°C Relative Humidity: 5%~90% Non-condensing Heat dissipation mode: Fan-free design
Certification	CE Mark FCC Part15,Class B RoHS 2.0
Package Content	User Manual

Installation Diagram

Standard DIN-rail mounting

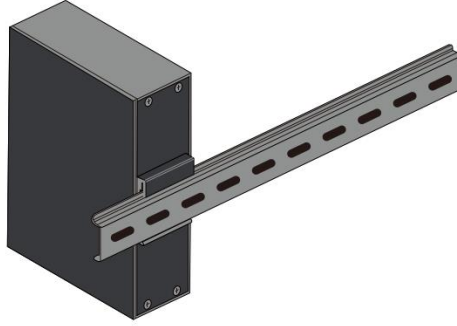

Dimension (mm)

