

Cat.6 F/UTP PE 4x2x23 AWG




Application

Multicore and symmetrical twisted pair cable for digital communications:

• Type **Cat. 6 F/UTP 4x2x23AWG PE** is designed for structured cabling networks with external laying along the walls of buildings, constructions, in mines and collectors. This cable type can operate at frequencies up to 350 MHz in conditions of increased electromagnetic action.



Cable structure

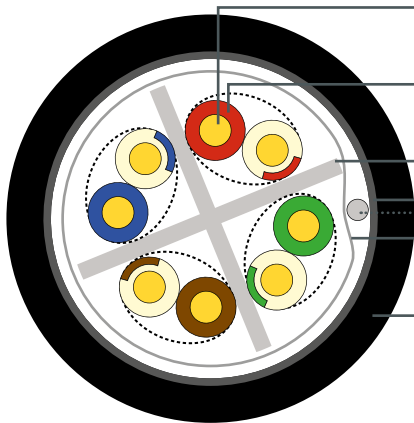

- **Conductive core:**
23 AWG copper soft wire
- **Insulation:** HDPE polyethylene, colored marking of insulation
- **Cross divider**
- **Screen:** Al-Pet tape min. 100% coverage
- **Pet tape** min. 100% coverage
- **A tinned copper contact wire, Ø 26 AWG**
- **Sheath:**
PE RAL 9011 Black

Standards

ISO/IEC 11801-1, IEC 61156-5
EN 50288-5-1
ANSI EIA/TIA 568.2-D



DATAWAY

