

# airMAX LiteBeam 5AC

LBE-5AC-GEN2

## Mechanical

Dimensions	358 x 271.95 x 272.5 mm (14.1 x 10.7 x 10.7")
Weight	Without mount: 800 g (1.8 lb)With mount 980 g (2.2 lb)
Wind survivability	200 km/h (125 mph)
Wind loading	275 N at 200 km/h (61.8 lbf at 125 mph)

## Hardware


Networking interface	(1) GbE RJ45 port
Power method	Passive PoE 2-pair (4, 5+; 7, 8 return)
Power supply	24V, 0.3A gigabit PoE adapter (Included)
Supported voltage range	22–27V DC
Max. power consumption	7W
Max. power output	25 dBm
Gain	23 dBi
Ambient operating temperature	-40 to 70° C (-40 to 158° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

## Operating Frequency (MHz)

Worldwide	5150-5875 MHz
USAU-NII-1U-NII-2AU-NII-2CU-NII-3	5150-5250 MHz5250-5350 MHz5240-5725 MHz5725-5850 MHz

## Management Radio (MHz)

Worldwide	2412 - 2472 MHz
US/CA	2412 - 2462 MHz

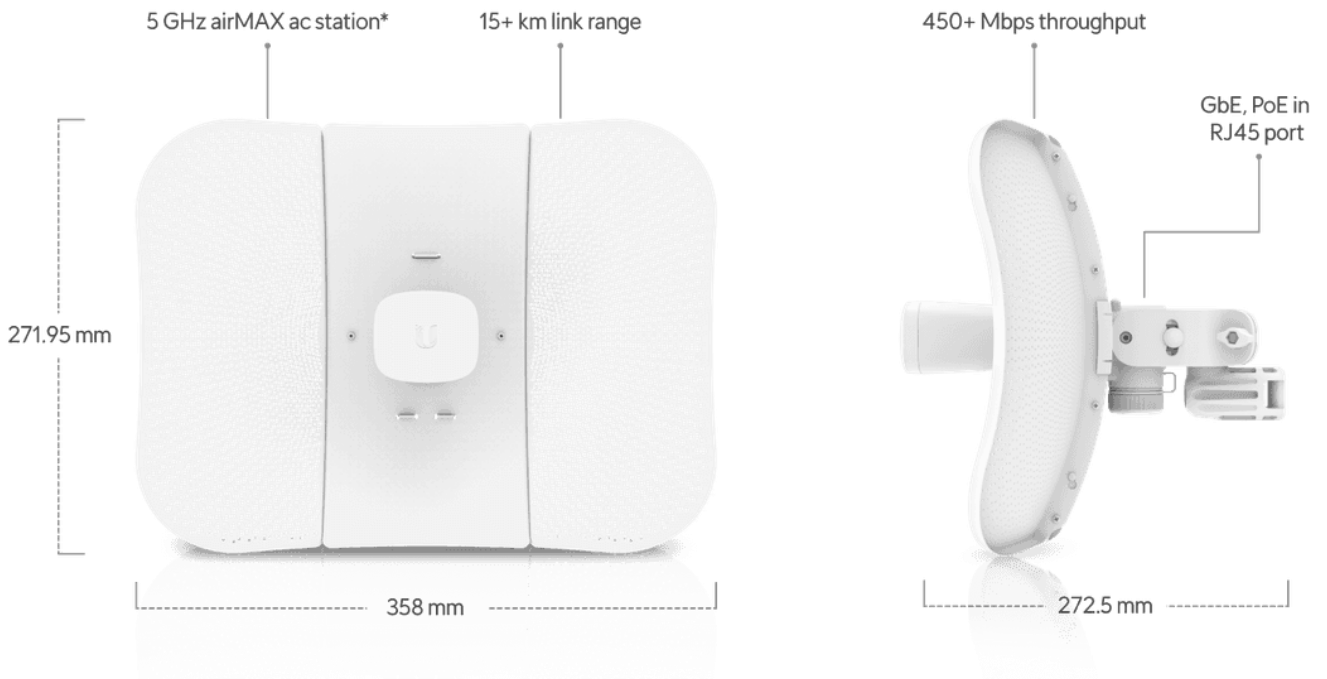

\*Compatible with airMAX ac devices.

\*\*24V DC, 0.3A GbE PoE adapter included.

