

Product:

UACC-ESE-16

Overview

Dimensions	481.4 x 480 x 132 mm (19 x 18.9 x 5.2")
Storage Capacity	(16) 2.5"/3.5" drive bays
Expansion Port	(1) SFF-8644 (24G)
Power Redundancy	✓
Form Factor	Rack mount (3U)

Hardware

Hard Drive Capacity	(16) 2.5/3.5" HDD / SSD support
Max. Power Budget for Drives	500W
Max. Power Consumption	550W
Power Method	(2) AC input, Hot-swappable power modules
Power Supply	(2) Hot-swappable AC/DC 550W power modules
Management	Master console
Weight	15.5 kg (34.2 lb)
Enclosure Material	SGCC steel
Mount Material	SGCC steel
Supported Rack Depth	The rails support 600 mm (23.6") four-post racks with square holes (9.5 x 9.5 mm) Posts depths ranging from 600–1066 mm (23.6–42")
Faceplate	3U Bezel Lite (Optional)
Ambient Operating Temperature	-5 to 40° C (23 to 104° F)

Ambient Operating Humidity	5 to 95% noncondensing
NDAA Compliant	✓
Certifications	FCC, CE, IC
LEDs	
HDD	✓
System	✓
CRPS	✓
Expansion Port	✓




Datasheet

Status LED




(16) 2.5"/3.5" HDD/SSD bays

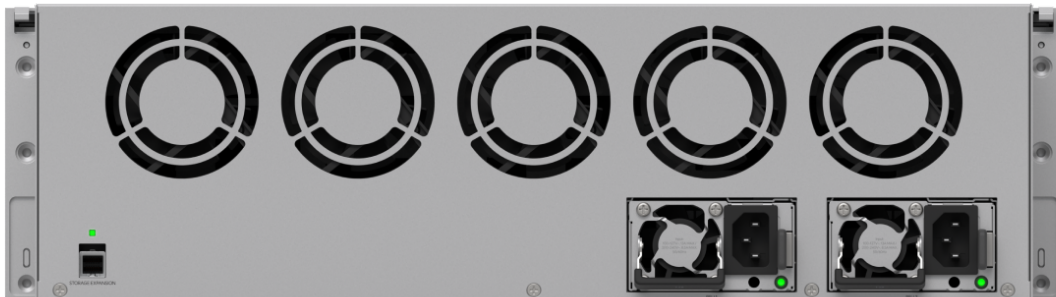

SFF-8644 expansion port (24G)


(2) Hot-swap PSUs for power redundancy

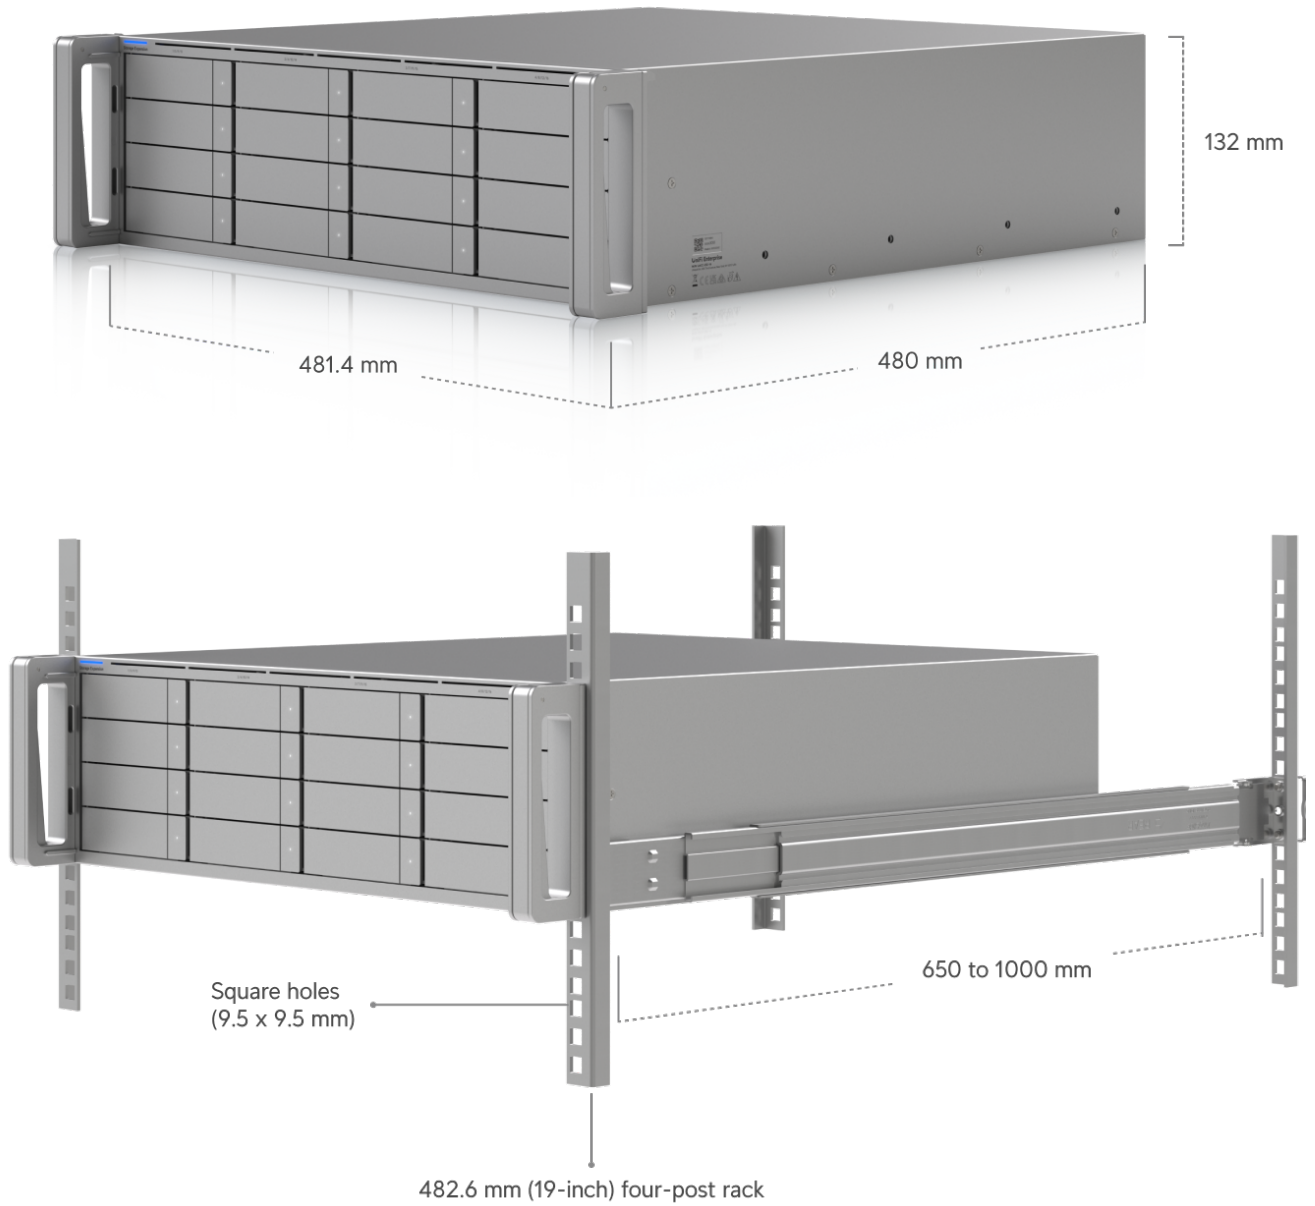

Enterprise NAS •
*Supports up to two expansion storages

Enterprise Storage Expansion •

Enterprise Storage Expansion •

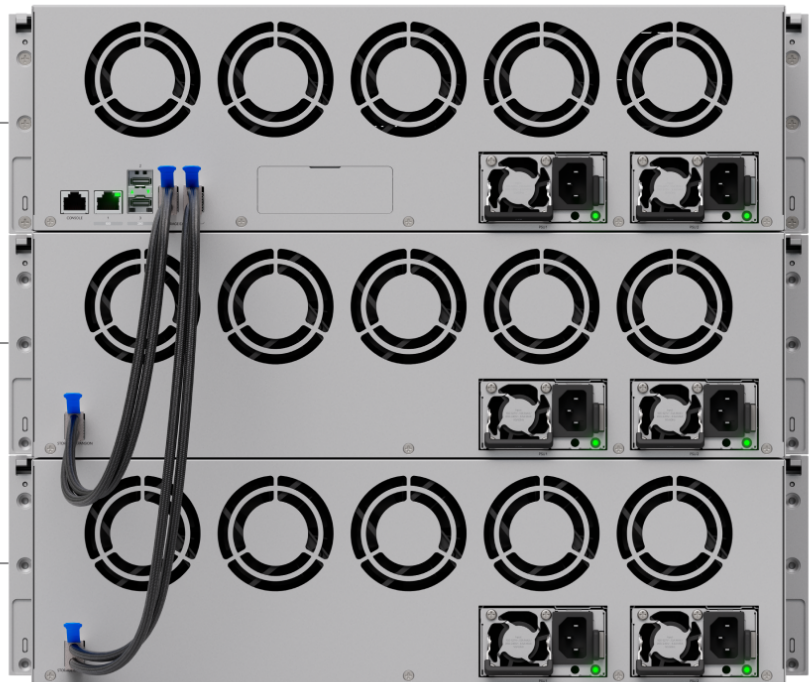

Enterprise NVR Core
*Supports up to two expansion storages

Enterprise Storage Expansion

Enterprise Storage Expansion

