Datasheet

# Product: UACC-Lock-Strike-Secure-15mm

## Overview

| | |
|---|---|
| Dimensions | Lock body: 80 x 40 x 35 mm (3.2 x 1.6 x 1.4")<br>Short front plate: 124 x 32 x 3 mm (4.9 x 1.3 x 0.1")<br>Long front plate: 202 x 36 x 3 mm (7.9 x 1.4 x 0.1") |
| Weight | Lock body: 185 g (6.5 oz)<br>Short front plate: 50 g (1.8 oz)<br>Long front plate: 130 g (4.6 oz) |
| Enclosure Material | Lock body: zinc alloy<br>Front plate: aluminum alloy<br>Latches: stainless steel |
| Ambient Storage Temperature | -20 to 70° C (-4 to 158° F) |
| Ambient Operating Temperature | -10 to 60° C (14 to 140° F) |
| Ambient Operating Humidity | 5 to 90% noncondensing |
| NDAA Compliant | ✓ |
| Certifications | FCC, IC, CE |
| Lock Features | |
| Lock Type | Fail secure |
| Support Door Type | Single door (Wooden/metal) |
| Holding Force | 1,200 kg (2,645 lb) |
| Current Power | 400mA ±10% |
| Support Voltage Range | 12V DC ±10% |
| Wiring | (1) Lock 12V/NO (red)<br>(1) Lock 12V/COM (black) |
| Mounting | Door frame recess mount |

## Door Status Contact

| | |
|---|---|
| Type | Dry contact |
| Logic | Door Open: DPS/+ & DPS/- = Open<br>Door Close: DPS/+ & DPS/- = Short |
| Rating | Max. 30V DC, 0.1A |

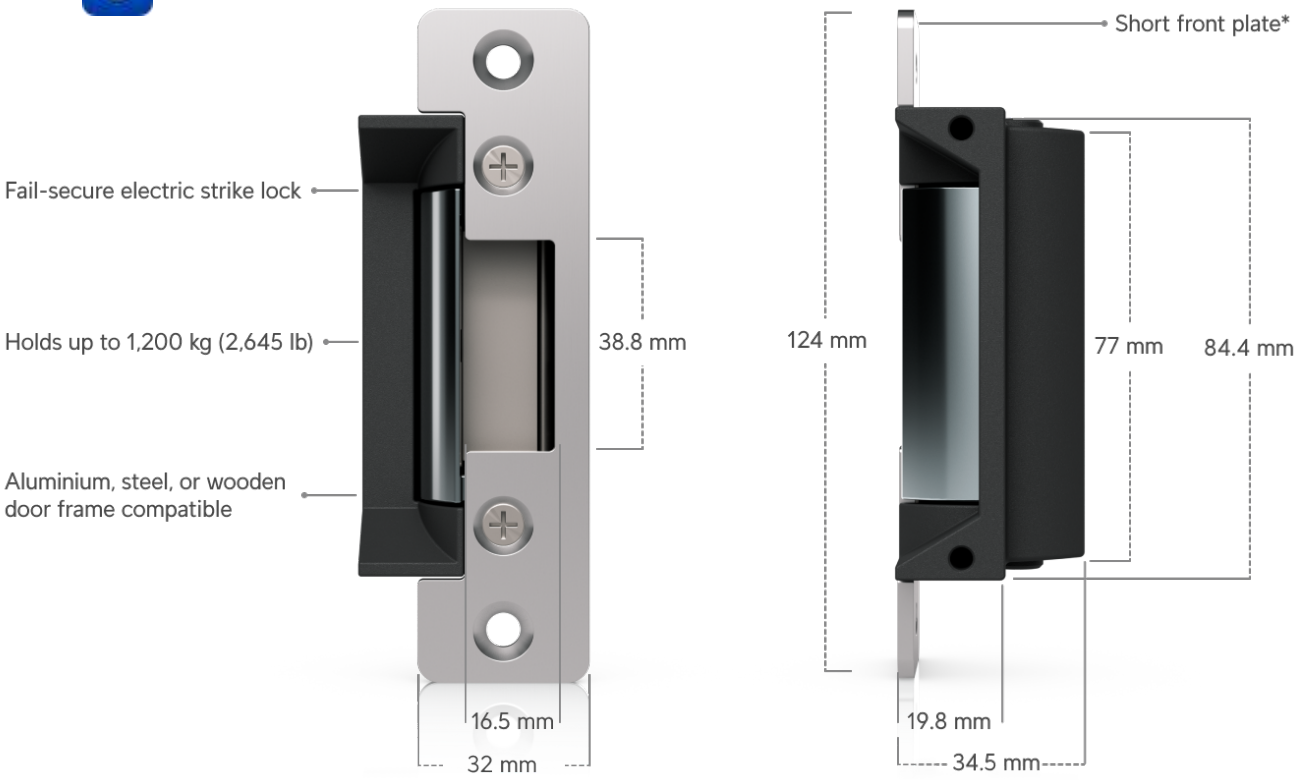


*The short and long front plates are included.

*The short and long front plates are included.

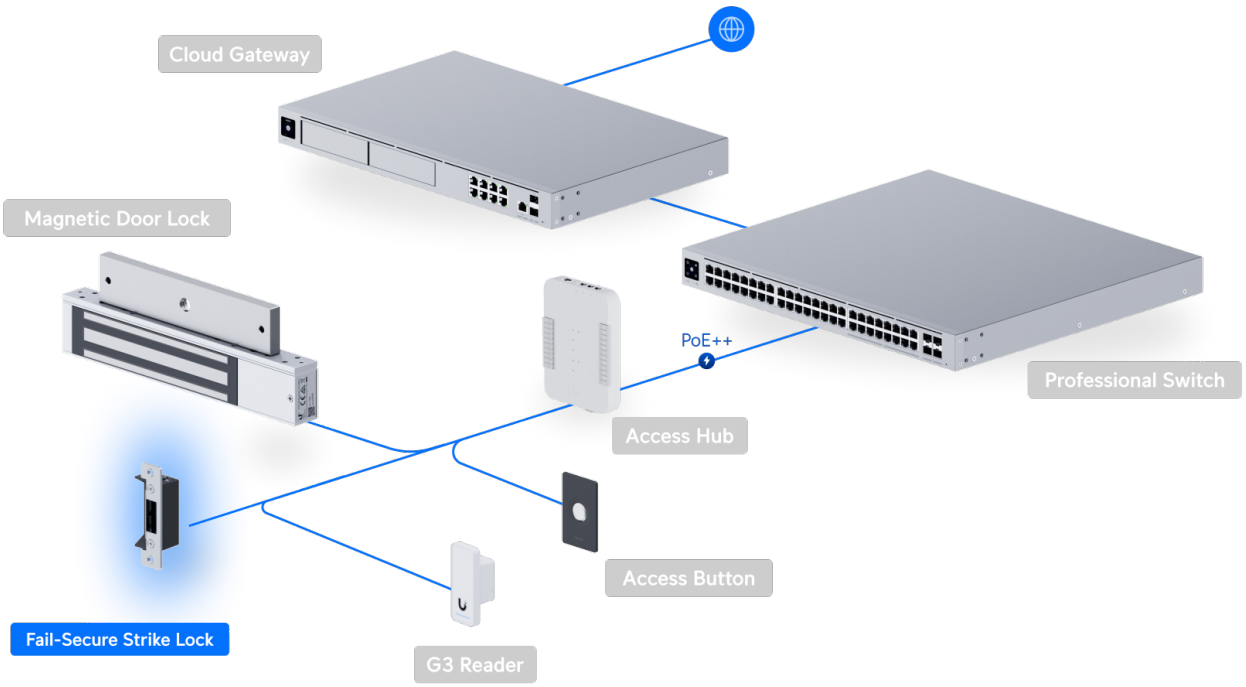
Cloud Gateway
Magnetic Door Lock
PoE++
Professional Switch
Access Hub
Access Button
Fail-Secure Strike Lock
G3 Reader