


Product: UACC-Lock-Strike-Secure-8mm

Overview


Dimensions	Lock body:112 x 21 x 28 mm (4.4 x 0.8 x 1.1") Short front plate:152 x 24.5 x 3 mm (6 x 0.9 x 0.1") Long front plate:250 x 25 x 3 mm (9.8 x 0.9 x 0.1")
Weight	Lock body: 197 g (6.9 oz) Short front plate: 62 g (2.2 oz) Long front plate: 97 g (3.4 oz)
Enclosure Material	Lock body: zinc alloy Front plate: stainless steel Latches: zinc alloy
Ambient Storage Temperature	-20 to 70° C (-4 to 158° F)
Ambient Operating Temperature	-10 to 60° C (14 to 140° F)
Ambient Operating Humidity	5 to 90% noncondensing
NDAA Compliant	✓
Certifications	FCC, IC, CE
Lock Features	
Lock Type	Fail secure
Support Door Type	Single door (Wooden/metal)
Holding Force	227 kg (500 lb)
Current Power	200mA ± 10%
Support Voltage Range	12V DC ±10%
Wiring	(1) Lock 12V/NO (red) (1) Lock 12V/COM (black) (1) DPS/- (white) (1) DPS/+ (orange)
Mounting	Door frame recess mount

Door Status Contact

Type	Dry contact
Logic	Door Open: DPS/+ & DPS/- = Open Door Close: DPS/+ & DPS/- = Short
Rating	Max. 30V DC, 0.1A

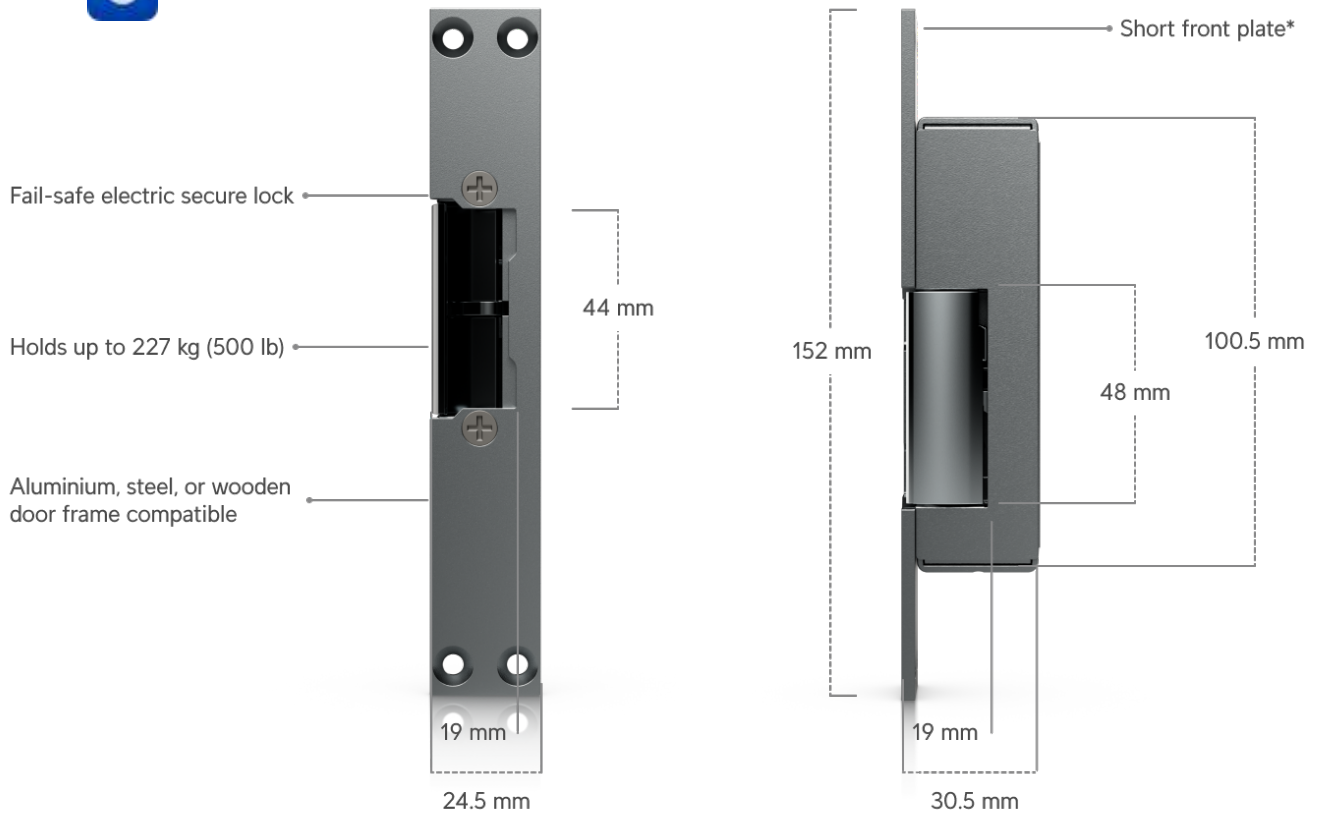

*The short and long front plates are included.

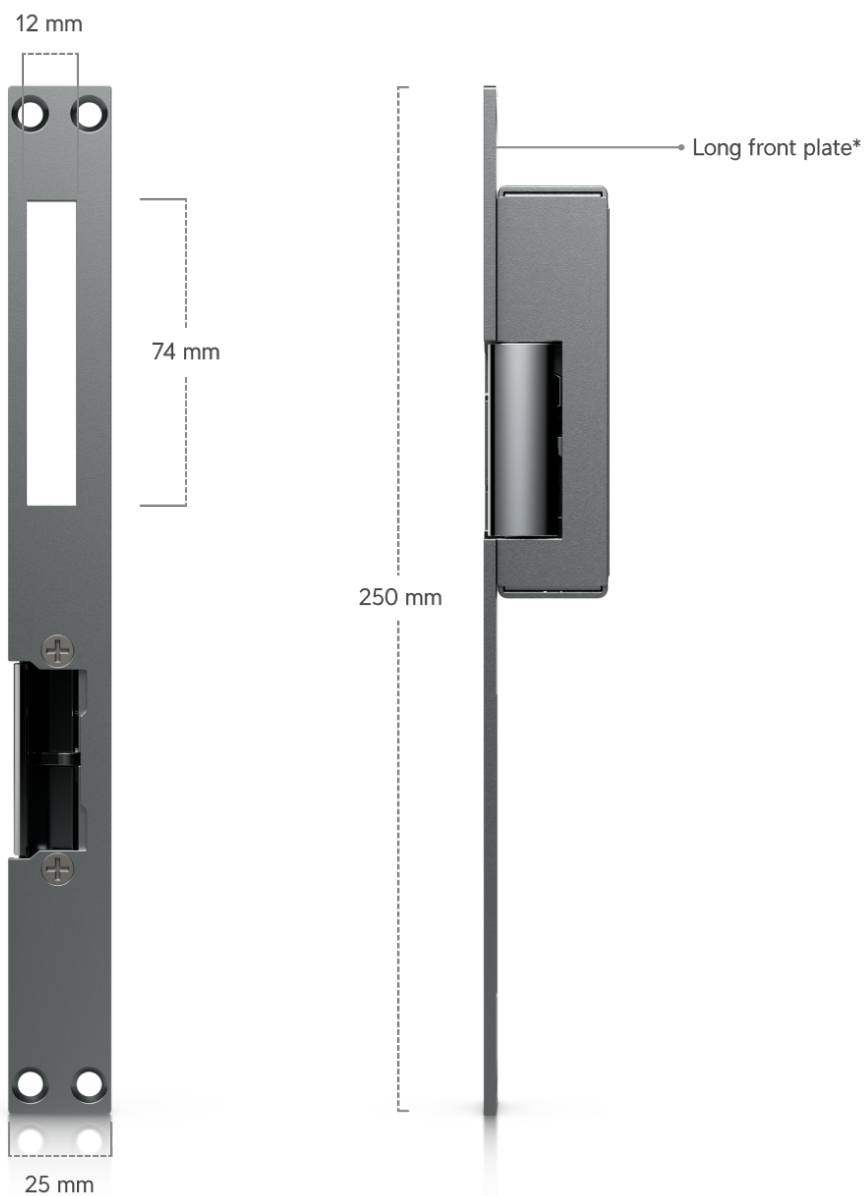

*The short and long front plates are included.

