Datasheet

# Product: UACC-Rack-12U-Wall-SW-P

## Overview

| | |
|---|---|
| Dimensions | Packaging: 725 x 840 x 735 mm (28.5 x 33.1 x 28.9")<br>Rack: 600 x 700 x 639 mm (23.6 x 27.6 x 25.2") |
| Weight | Packaging: 31.8 kg (70.1 lb)<br>Rack: 25.8 kg (56.9 lb) |
| Enclosure Material | SPCC steel<br>Door/side panels: 1.2 mm (0.05")<br>Main body: 1.2 mm (0.05")<br>Posts: 2 mm (0.08") |
| Color | White |
| Treatment | Powder coating |
| NDAA Compliant | ✓ |

## Rack Features

| | |
|---|---|
| U Height | 12U |
| Rack Type | 4 post, enclosed cabinet |
| Mounting Hole Type | Square |
| Adjustable Mounting Depth | Default 434 mm (17.1")<br>Max. 559 mm (22")<br>Adjustable pitch 25 mm (1") |
| Max. Weight Capacity | 80 kg (176 lb) |
| Front Door | Perforated<br>Default left-hand outswing, reversible |
| Rear Door | Solid<br>Swing-out |
| Side Panels | (2) Solid, removable and lockable |
| Mounting | Wall mount |
| Fan Module | (2) Pre-installed 120 x 120 x 38 mm AC fan units |
| Acoustic Noise | ≤ 50 dB(A) sound pressure level |
| Grounding Lugs | ✓ |
| Cable Entry Opening | (1) Rear wall: 350 x 100 mm (13.8 x 3.9")<br>(2) Top: 235 x 62 mm (9.3 x 2.4")<br>(4) Top knockout: 35 mm (1.4")<br>(1) Bottom: 235 x 62 mm (9.3 x 2.4")<br>(4) Bottom knockout: 35 mm (1.4") |
| Security | (1) Front door lock<br>(1) Swing out door lock<br>(4) Side panel locks<br>(2) Keys |
| Standard | CE; EIA/ECA-310-E; RoHS |

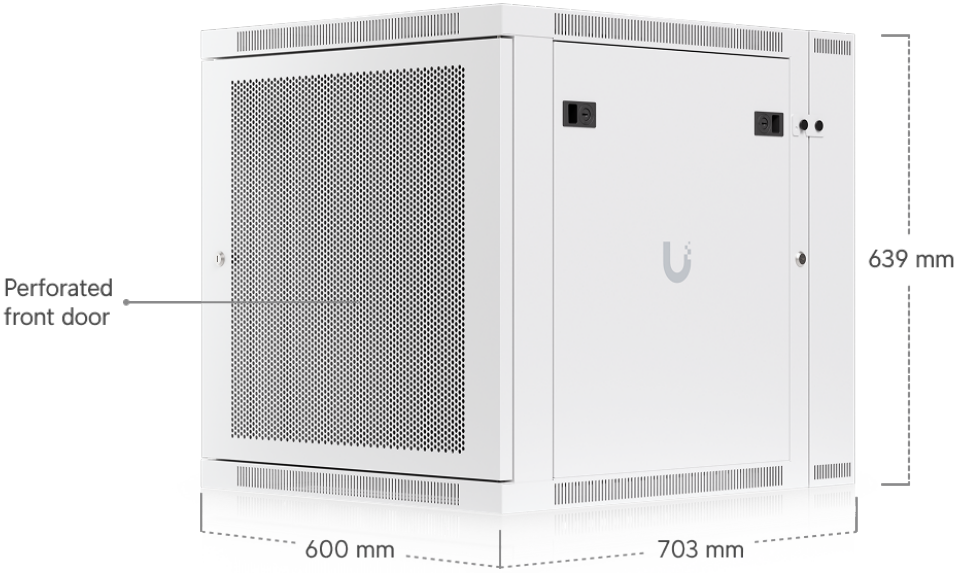
Perforated
front door
639 mm
600 mm
703 mm

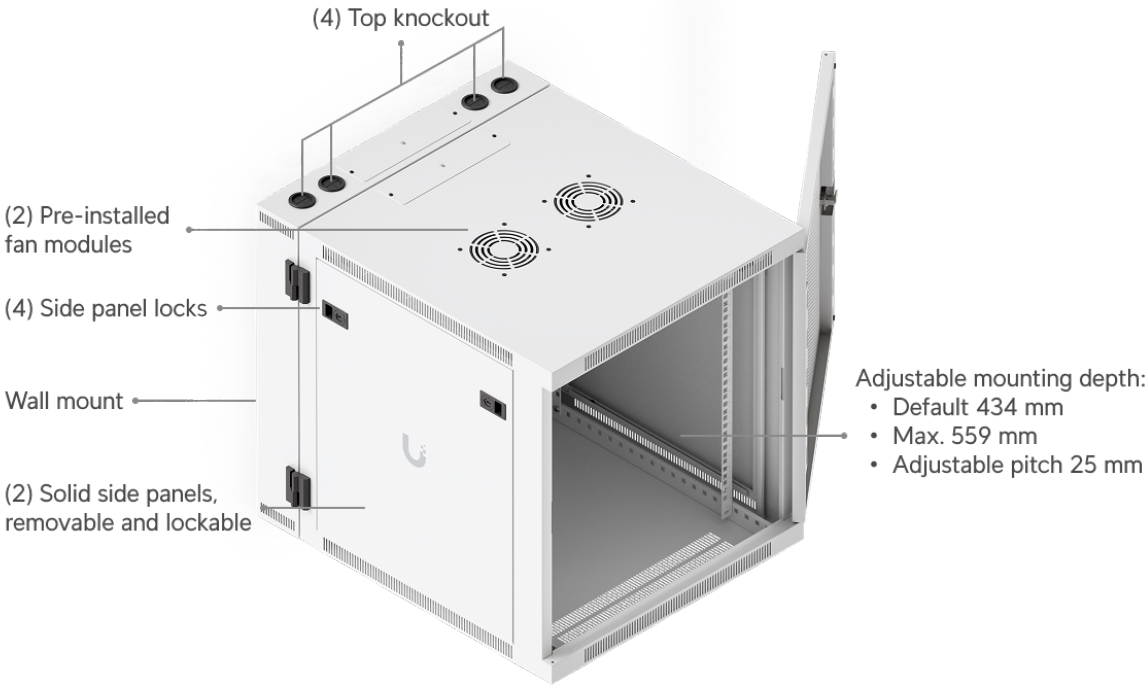
(4) Top knockout
(2) Pre-installed fan modules
(4) Side panel locks
Wall mount
(2) Solid side panels, removable and lockable
Adjustable mounting depth:
• Default 434 mm
• Max. 559 mm
• Adjustable pitch 25 mm

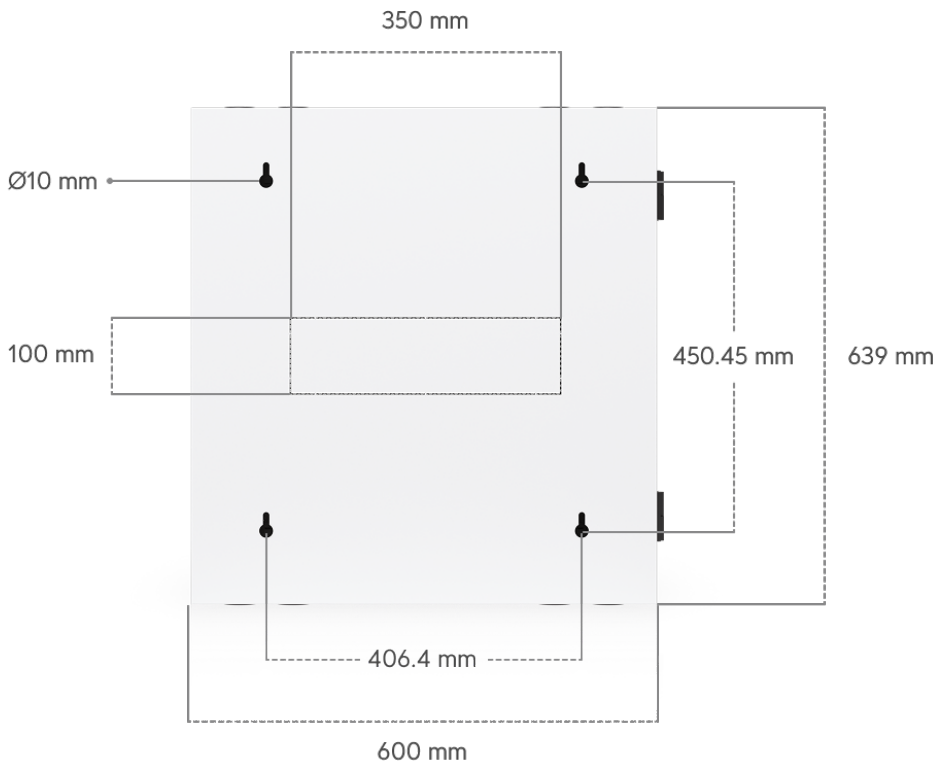
350 mm
Ø10 mm
100 mm
450.45 mm
639 mm
406.4 mm
600 mm