Datasheet

# Product: UACC-Rack-42U-800-P

## Overview

| | |
|---|---|
| Dimensions | Packaging: 740 x 965 x 2,223 mm (29.1 x 38 x 87.5")<br>Rack with caster: 600 x 800 x 2,050 mm (23.6 x 31.5 x 80.7")<br>Rack without caster: 600 x 800 x 1,966 mm (23.6 x 31.5 x 77.4") |
| Weight | Packaging: 110.4 kg (243.4 lb)<br>Rack: 84.6 kg (186.5 lb) |
| Enclosure Material | SPCC steel<br>Door/side panels: 1.2 mm (0.05")<br>Main body: 1 mm (0.04")<br>Posts: 2 mm (0.08") |
| Color | White |
| Treatment | Powder coating |
| NDAA Compliant | ✓ |

## Rack Features

| | |
|---|---|
| U Height | 42U |
| Rack Type | 4 post, enclosed cabinet |
| Mounting Hole Type | Square |
| Adjustable Mounting Depth | Default 607.2 mm (23.9")<br>Max. 682.2 mm (26.9")<br>Adjustable pitch 15 mm (0.6") |
| Max. Weight Capacity | Static 800 kg (1764 lb)<br>Rolling 320 kg (705 lb) |
| Front Door | Perforated<br>Default left-hand outswing, reversible |
| Rear Door | Perforated<br>Default left-hand outswing, reversible |
| Side Panels | (4) Solid, removable and lockable |
| Mounting | Floor stand |
| Lockable Casters | ✓ |
| Leveling Stands | ✓ |
| Cabinet Interconnect | ✓ |
| Floor Anchor | ✓ |
| Fan Module | (2) Pre-installed 120 x 120 x 38 mm AC fan units |
| Grounding Lugs | ✓ |
| Cable Entry Opening | (2) Top: 335 x 52.5 mm (13.2 x 2.1")<br>(2) Bottom: 335 x 52.5 mm (13.2 x 2.1") |
| Security | (1) Front door lock<br>(1) Rear door lock<br>(8) Side panel locks<br>(3) Keys |
| Standard | CE; EIA/ECA-310-E; RoHS |

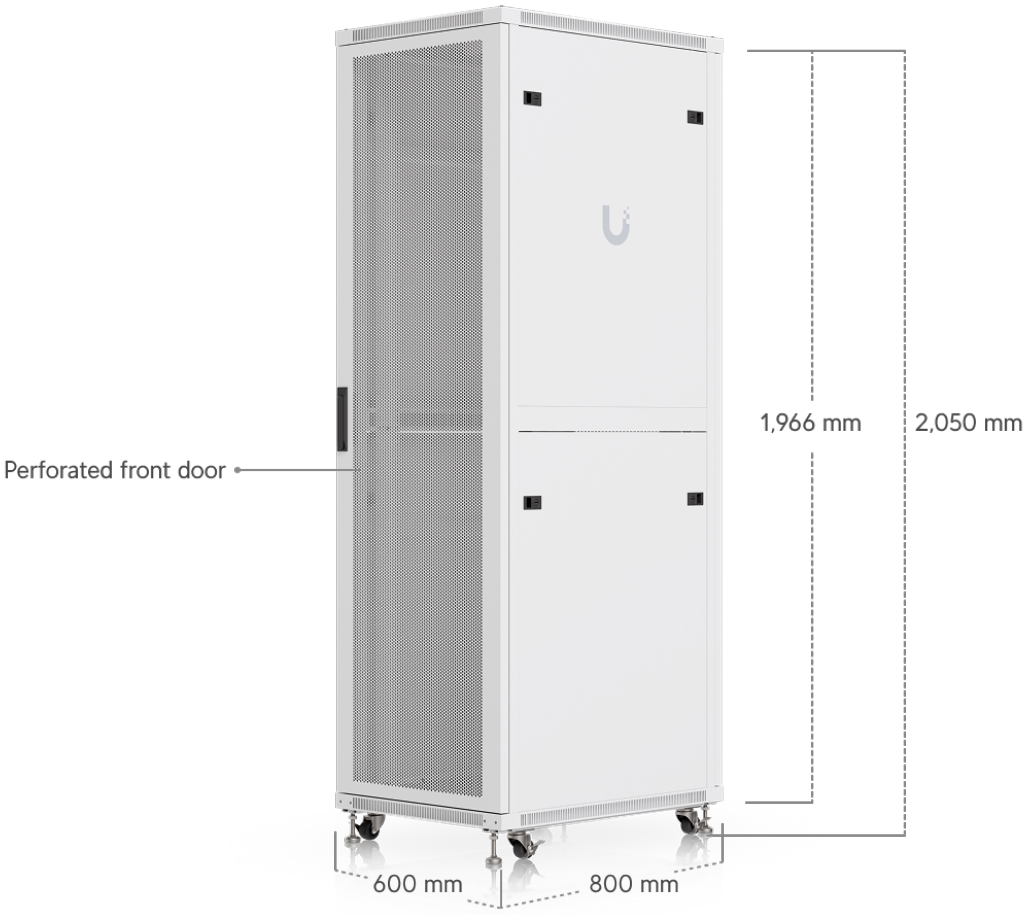
Perforated front door
1,966 mm
2,050 mm
600 mm
800 mm

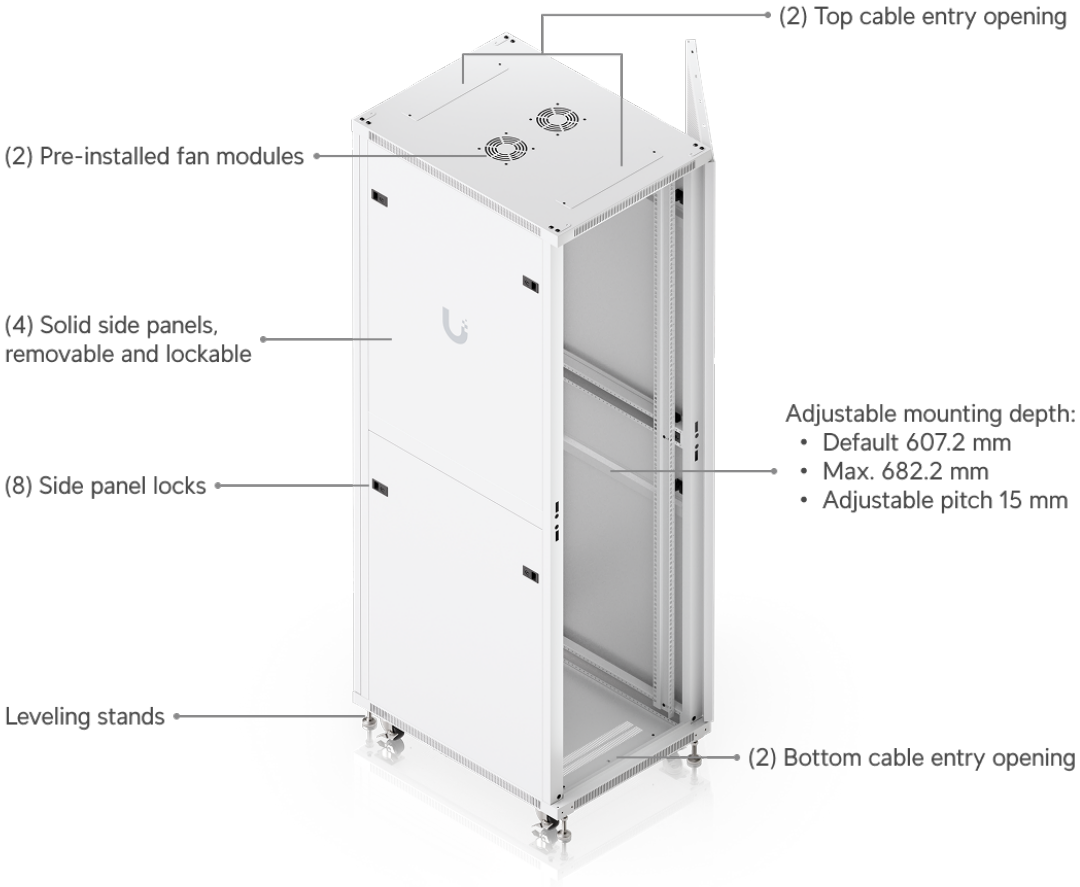
(2) Top cable entry opening
(2) Pre-installed fan modules
(4) Solid side panels,
removable and lockable
(8) Side panel locks
Leveling stands
Adjustable mounting depth:
• Default 607.2 mm
• Max. 682.2 mm
• Adjustable pitch 15 mm
(2) Bottom cable entry opening