

# Dream Machine Pro Max

UDM-Pro-Max

## Mechanical

Dimensions	442.4 x 43.7 x 285.6 mm (17.4 x 1.7 x 11.2")
Weight	4.7 kg (10.4 lb)
Enclosure material	Aluminium CNC, SGCC steel
Mount material	SGCC steel

## Hardware

Processor	Quad-core ARM® Cortex®-A57 at 2.0 GHz
System memory	8 GB DDR4
On-board storage	32 GB eMMCIntegrated 128 GB SSD
Management interface	EthernetBluetooth
Networking interface	LAN:(8) GbE RJ45 ports(1) 10G SFP+ portWAN:(1) 2.5 GbE RJ45 port(1) 10G SFP+ port
IDS/IPS throughput	5 Gbps**Measured with iPerf3 on a DHCP network. Performance may be reduced with PPPoE depending on ISP implementation.
Power method	(1) Universal AC input, 100—240V AC, 2A Max., 50/60 Hz(1) USP-RPS DC input, 11.5V DC, 8.7A
Power supply	AC/DC, internal, 100W
Supported voltage range	100—240V AC
Max. power consumption	100W
ESD/EMP protection	Air: ± 15kV, contact: ± 8kV
LCM display	(1) 1.3" touchscreen
Button	Factory reset
Ambient operating temperature	-10° to 40° C (14° to 104° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC


## Gateway Features

Performance	Redundant WAN with failover and load balancing WiFi QoS with UniFi APs Application, domain, and country-based QoS Application and device type identification Additional internet failover with LTE Backup Internet quality and outage reporting
Next-generation security	Application-aware firewall rules Signature-based IPS/IDS threat detection Content, country, domain, and ad filtering VLAN/subnet-based traffic segmentation Full stateful firewall
Advanced networking	License-free SD-WAN WireGuard, L2TP and OpenVPN server OpenVPN client OpenVPN and IPsec site-to-site VPN One-click Teleport and Identity VPN Policy-based WAN and VPN routing DHCP relay Customizable DHCP server IGMP proxy IPv6 ISP support

---

## LEDs

Ethernet	Green: link/activity
SFP+	Green: link/activity
HDD	White: disk activity Amber: disk error
RPS	Blue: ready

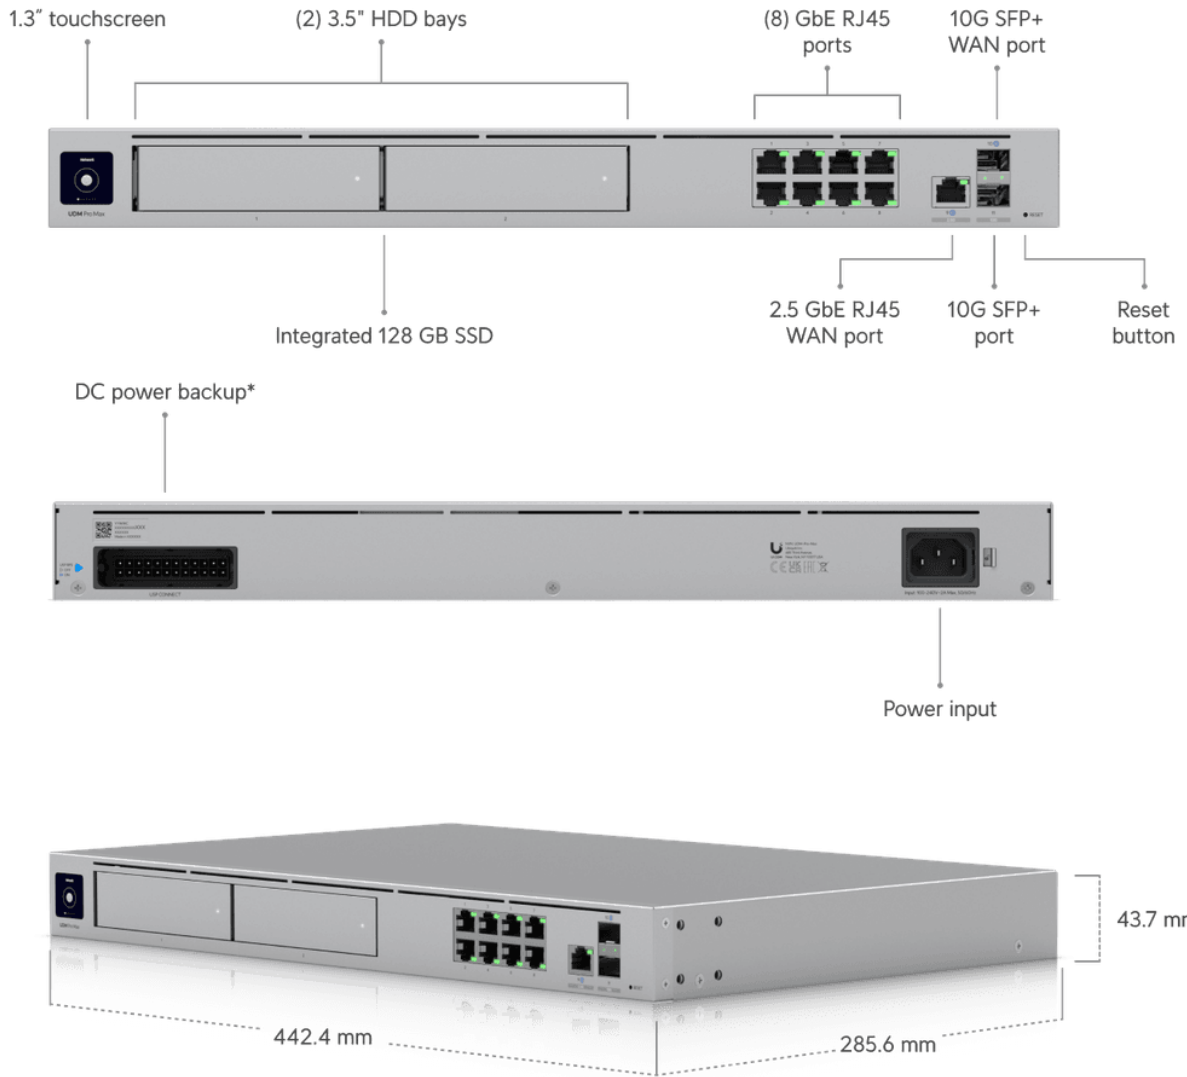

\*Requires UniFi Power Backup.