

Mechanical

Dimensions	442 x 325 x 87 mm (17.4 x 12.8 x 3.4")
Weight	Without mounting brackets: 9.2 kg (20.3 lb)With mounting brackets: 9.5 kg (20.8 lb)
Enclosure material	SGCC steel
Mount material	SGCC steel

Hardware

Processor	Quad-Core ARM® Cortex®-A57 at 1.7 GHz
System memory	8 GB
Management interface	Ethernet In-Band
Networking interface	(1) GbE RJ45 port(1) 1/10 GbE SFP+ port
RF interface	Bluetooth 4.1
Power method	(1) Universal AC input, 100—240V AC, 3A Max., 50/60 Hz(1) USP-RPS DC input, 11.5V DC, 13.91A
Power supply	AC/DC, internal, 200W
Supported voltage range	100—240V AC
Max. power consumption	160W
Max. power budget for Drives	135W
ESD/EMP protection	Air: ± 12kV, contact: ± 8kV
LCM Display	(1) 1.3" touchscreen
Ambient operating temperature	-5 to 40° C (23 to 104° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	FCC, CE, IC

LEDs

Ethernet

Green: 1 Gbps Amber: 10/100 Mbps

SFP+

White: 10 Gbps Green: 1 Gbps

HDD

White: disk detected Amber: disk error


RPS

Blue: ready

Application Requirements

UniFi Drive

Version 1.16.0 and later

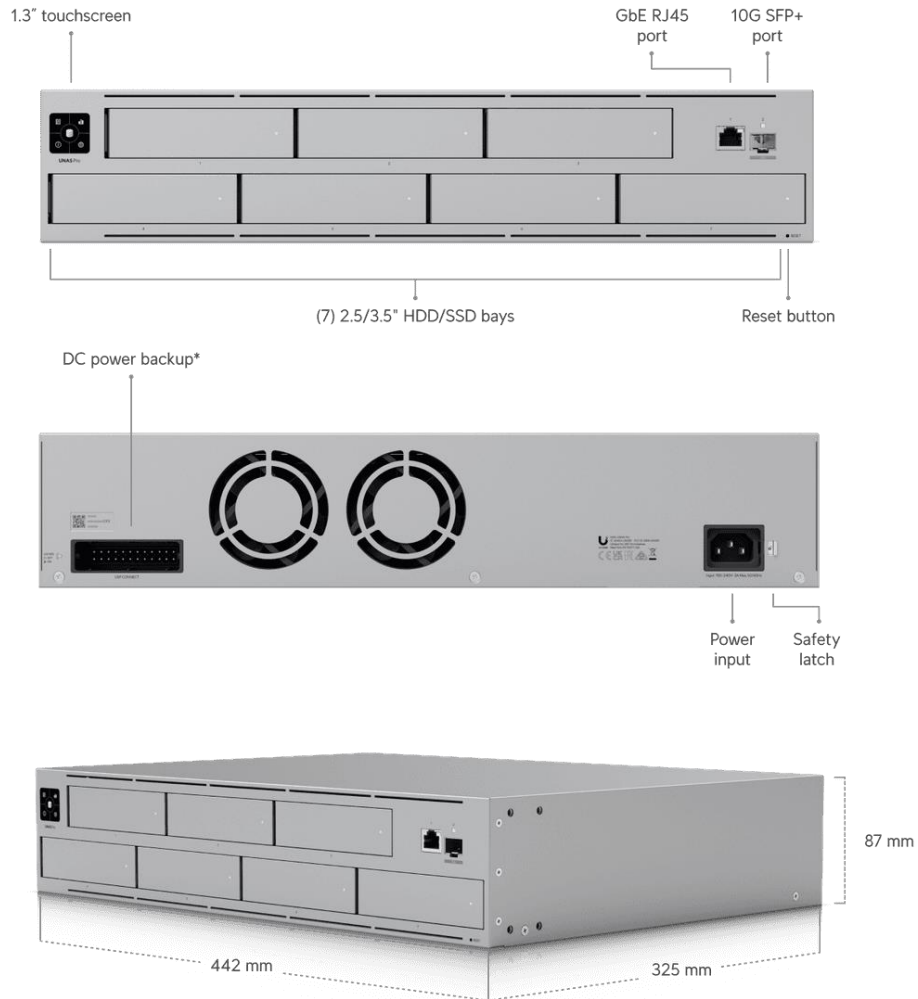

*Requires UniFi Power Backup.