

G5 Flex

UVC-G5-Flex

Mechanical

Dimensions	Ø48 x 107.5 mm (Ø1.9 x 4.2")
Weight	170 g (6 oz)
Enclosure material	Polycarbonate
Mount material	Polycarbonate
Weatherproofing	IPX4
Resistance	IK04

Optics

Sensor	5MP CMOS
Lens	Fixed focal length
View angle	H: 102.4°, V: 54.9°, D: 120.6°
Night mode	Built-in IR LED illumination and IR cut filter

Video

Resolution	4MP 2688 x 1512 (16:9)
Max. frame rate	30 FPS
Image settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

System


Processor	Dual-core Arm® Cortex®-A7 based chip
Networking interface	10/100 MbE RJ45 port
Max. power consumption	4W
Power method	PoE
Supported voltage range	37—57V DC
LED	R/G/B/W
Button	Factory reset
Mounting	Desktop, wall, pole, hard-ceiling (Included)Ceiling, conduit (Sold separately)
Ambient operating temperature	-20 to 40° C (-4 to 104° F)
Ambient operating humidity	0 to 90% noncondensing
Certifications	FCC, IC, CE

Audio

Microphone	Yes (Can be disabled)
------------	-----------------------

Software

Web application	UniFi Protect: Version 2.2.7 or 2.7.28 and later
Mobile app	UniFi Protect iOS™ and Android™: Version 1.10.0 and later

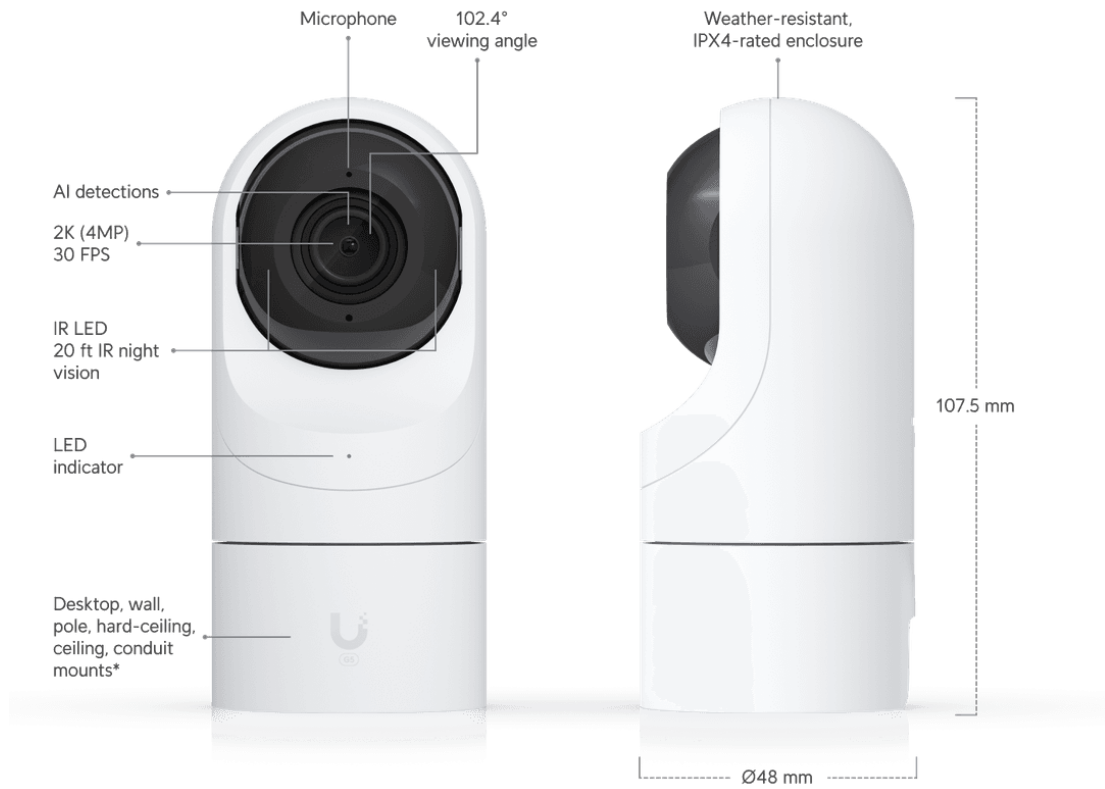

* Ceiling and conduit mounts sold separately.