



# PV String Inverter PV Storage Inverter



Afore New Energy Technology (Shanghai) Co., Ltd.

Building 7, No.333 Wanfang Rd, Minhang District,  
Shanghai, China. 201112

**T** +86-21-54326236

**F** +86-21-54326136

**W** [www.aforeenergy.com](http://www.aforeenergy.com)

**E** [info@aforeenergy.com](mailto:info@aforeenergy.com)

## About Us

Afore is a leading PV inverter provider from China, with more than twelve years dedicated experience in PV inverter R&D and manufacturing, Afore inverters have been installed in Europe, Australia, China, Indian, Japan, North America and South America, meeting the needs of global users.

We provide single and three-phase high-efficiency PV string inverters for a capacity of 1kW to 60kW, storage inverters (single phase 1-6kW, three phase 3-20kW, split phase 3-9.6kW, AC coupled) and all-in-one storage products. All of our inverters are integrated with smart monitoring system.

We offer not just good products, but also high-efficient local support to our partners and users throughout the inverter life span. Make sure the customers receive reliable returns by choosing Afore!



**2010**

Afore New Energy Technology (Shanghai) Co. Ltd. was established.

**2011**

Afore inverter was installed in China's first residential solar PV system.

**2012**

Afore inverter showed up in Secrets of PV War, one episode of a large studio TV program Dialogue on CCTV-2.

**2013**

Afore was identified as high-tech enterprise by Shanghai government and becomes a member of Shanghai Solar Energy Society.


**2014**

Sales amount got continuous growth in Europe, Asia, Australia and other regions.

**2015**

The first light-weighted design three-phase PV string inverter (10 - 30kW) .


## Contents



### Single-phase String PV Inverter

#### Residential System


HNS1000TL-1, HNS1500TL-1, HNS2000TL-1, HNS2500TL-1, HNS3000TL-1, HNS3000TL, HNS3600TL, HNS4000TL, HNS5000TL, HNS6000TL, HNS7000TL, HNS8000TL, HNS9000TL, HNS10000TL



### Three-phase String PV Inverter

#### Residential & Small Commercial System

BNT003KTL, BNT004KTL, BNT005KTL, BNT006KTL, BNT008KTL, BNT010KTL, BNT012KTL, BNT015KTL, BNT017KTL, BNT020KTL, BNT025KTL



### Three-phase String PV Inverter

#### Commercial System and Power Plants

BNT030KTL, BNT036KTL, BNT040KTL, BNT050KTL, BNT060KTL



### Hybrid Storage Inverter

#### Residential and Commercial Storage System

AF1k-SL-1, AF1.5k-SL-1, AF2k-SL-1, AF2.5k-SL-1, AF3k-SL-1, AF3.6k-SL-1, AF3k-SL, AF3.6k-SL, AF4k-SL, AF4.6k-SL, AF5k-SL, AF5.5k-SL, AF6k-SL

AF1K-SL-0, AF1.5K-SL-0, AF2K-SL-0, AF2.5K-SL-0, AF3K-SL-0, AF3.6K-SL-0, AF4K-SL-0, AF4.6K-SL-0

AF3K-TH, AF4K-TH, AF5K-TH, AF6K-TH, AF8K-TH, AF10K-TH, AF12K-TH, AF15K-TH, AF17K-TH, AF20K-TH, AF25K-TH, AF30K-TH

AF3K-DH, AF3.6K-DH, AF4K-DH, AF4.6K-DH, AF5K-DH, AF5.5K-DH, AF6K-DH, AF7K-DH, AF7.6K-DH, AF8K-DH, AF8.6K-DH, AF9.6K-DH

Battery Bank, All-in-one Solution



### Monitoring Module

Monitoring Module, Monitoring Services, Monitoring Interface



49.5kw Fukuoka ,Japan



49.5kw Hiroshima, Japan



1.5MW Jiangsu,China



15kw Perth, Australia



15kw Perth, Australia



800kw Dongtai, China



2.0kw Dorchester, UK



2.0MW Jiangsu,China

0.8MW Dongtai, China



1.5MW Jiangsu,China



49.5kw Fukuoka ,Japan



4.0kw Cambridge, UK



1.3MW Dongtai, China



50kw Poland

## 2016

Successful launched 6.0-8.0kW single-phase PV inverters, continues to expand market share.

## 2017

Three phase 50-60kw inverters are launched, which have the highest water-proofing level IP68 fan in the industry.

## 2018

The 5th Generation Inverters and Hybrid Inverter (3-5kW) launched.

## 2019

Single-phase low-voltage hybrid storage inverter launched.

## 2020

The 6th Generation Inverters and single-phase high-voltage hybrid storage inverter launched.


## 2021

ATON series three phase inverter 3-25kW and US Hybrid Storage Inverter 3-9.6kW launched.

Residential HNS series

# HNS-TL1

1-3 kW

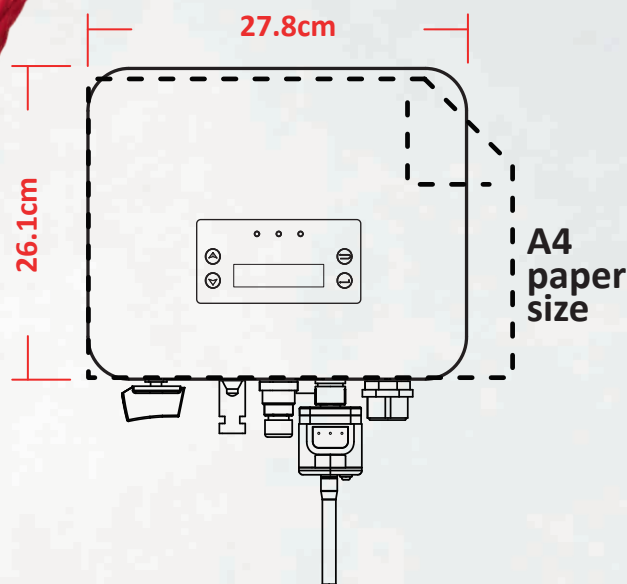

The Afore HNS Series Single-phase inverters are designed for residential PV system applications, rating from 1kW to 3kW. All models have unibody housings with aluminum structure which is anodized, increasing durability and effectively prevents corrosion. The unibody housing can ensure efficient heat dissipation, which significantly improves the reliability and extends the life of the inverters.

The inverter menu is activated by sensor touch buttons. Communication implements are via the Wi-Fi module (can be changed to Ethernet / GPRS). Check the system status anytime and anywhere via online portal or APP.



**ANTI-FLOW**  
Anti-Feed-in Function



**PV OVERSIZE**  
Max. 1.5 time  
PV Oversize Capacity



**PROTECTION**  
Multiple intelligent  
Protections



**SMART**  
Smart IV Curve Scanning



**Wi-Fi**  
Wi-Fi Standard  
Ethernet/GPRS Optional



**CONFIGURATION**  
Quick & Easy  
Config. via Wi-Fi



**MODBUS**  
MODBUS  
Communication Ready

MPPT efficiency > 99.9%



No fans design

Compact and light body design



Quick and easy installation

Active and reactive power compensation, adjust power factor



AC output 1.1x continuous operation

PV Input Data	HNS1000TL-1	HNS1500TL-1	HNS2000TL-1	HNS2500TL-1	HNS3000TL-1
Max. DC Power ( W )	1500	2250	3000	3750	4200
Max. DC Voltage ( V )	500	500	500	500	500
MPPT Voltage Range ( V )	50-500	50-500	50-500	50-500	50-500
MPPT Full Power Voltage Range ( V )	70-500	110-500	145-500	180-500	220-500
Rated Input Voltage ( V )	360				
Start-up Voltage ( V )	50				
Max. Input Current ( A )	14				
Max. Short Current ( A )	18				
No. of MPP Tracker / No. of PV String	1/1				
Input Connector Type	MC4				
AC Output Data	HNS1000TL-1	HNS1500TL-1	HNS2000TL-1	HNS2500TL-1	HNS3000TL-1
Max. Output Power ( W )	1100	1650	2200	2750	3300
Nominal Output Power ( W )	1000	1500	2000	2500	3000
Max. Output Current ( A )	6	9	12	13	15
Nominal Output Voltage ( V )	L/N/PE, 220Vac, 230Vac, 240Vac				
Grid Voltage Range	180Vac-276Vac (According to local standard)				
Nominal Output Frequency ( Hz )	50/60				
Grid Frequency Range	45-55Hz/54-66Hz (According to local standard)				
Output Power Factor	1 default (adjustable from 0.8 leading to 0.8 lagging)				
Output Current THD	<3%				
Efficiency	HNS1000TL-1	HNS1500TL-1	HNS2000TL-1	HNS2500TL-1	HNS3000TL-1
Max. Efficiency	97.50%	97.80%	98.10%	98.10%	98.13%
Euro Efficiency	96.60%	96.70%	96.80%	97.23%	97.56%
Protection	HNS1000TL-1	HNS1500TL-1	HNS2000TL-1	HNS2500TL-1	HNS3000TL-1
PV Reverse Polarity Protection	YES				
PV Insulation Resistance Detection	YES				
AC Short Circuit Protection	YES				
AC Over Current Protection	YES				
AC Over Voltage Protection	YES				
Anti-Islanding Protection	YES				
Residual Current Detection	YES				
Over Temperature Protection	YES				
Integrated DC switch	YES				
Surge Protection	Integrated (Type III)				
Smart IV Curve Scanning	YES				
Quick Arc Fault Circuit Interruption	Optional				
General Data	HNS1000TL-1	HNS1500TL-1	HNS2000TL-1	HNS2500TL-1	HNS3000TL-1
Dimensions (H x W x D, mm)	260 x 280 x 116				
Weight ( kg )	6				
Protection Degree	IP65				
Enclosure Material	Aluminum				
Ambient Temperature Range (°C)	-25 to 60				
Humidity Range	0-100%				
Topology	Transformerless				
Communication Interface	RS485 / WiFi / Wire Ethernet / GPRS (optional)				
Cooling Concept	Convection				
Noise Emission ( db )	<21				
Night Power Consumption ( W )	<0.2		<1		
Max. Operation Altitude ( m )	4000				
Certifications and Standards	HNS1000TL-1	HNS1500TL-1	HNS2000TL-1	HNS2500TL-1	HNS3000TL-1
EMC Standard	EN/IEC 61000-6-2, EN/IEC 61000-6-3, EN61000-3-2, EN61000-3-3, EN61000-3-11, EN61000-3-12				
Safety Standard	IEC 60068, UL1741, EN62109				
Grid-connection	IEEE1547, CSA C22, EN50549, VDE4105, VDE0126, RD1699, ABNT NBR16149 & 16150, AS4777.2, NB/T32004, G98/G99, IEC61727				

Residential HNS series

# HNS-TL

3-6 kW



The Afore HNS Series Single-phase inverters are designed for residential PV system applications, rating from 3kW to 6kW. All models have unibody housings with aluminum structure which is anodized, increasing durability and effectively prevents corrosion. Equipped with external inductors, the unibody housings can ensure efficient heat dissipation, which significantly improves the reliability and extends the life of the inverters.

The inverter menu is activated by sensor touch buttons. Communication implements are via the Wi-Fi module (can be changed to Ethernet / GPRS). Check the system status anytime and anywhere via online portal or APP.



**ANTI-FLOW**  
Anti-Feed-in Function



**PV OVERSIZE**  
Max. 1.5 time  
PV Oversize Capacity



**PROTECTION**  
Multiple intelligent  
Protections



**SMART**  
Smart IV Curve Scanning



**Wi-Fi**  
Wi-Fi Standard  
Ethernet/GPRS Optional



**CONFIGURATION**  
Quick & Easy  
Config. via Wi-Fi



**MODBUS**  
MODBUS  
Communication Ready

MPPT efficiency > 99.9%



Two MPPT design



Active and reactive power compensation, adjust power factor



No fans design



Quick and easy installation



High-quality power output and low THDI

PV Input Data	HNS3000TL	HNS3600TL	HNS4000TL	HNS5000TL	HNS6000TL
Max. DC Power ( W )	4500	5400	6000	7000	8400
Max. DC Voltage ( V )	600	600	600	600	600
MPPT Voltage Range ( V )	70-550	70-550	70-550	70-550	70-550
MPPT Full Power Voltage Range ( V )	110-550	130-550	145-550	180-550	220-550
Rated Input Voltage ( V )	360				
Start-up Voltage ( V )	70				
Max. Input Current ( A )	14 x 2				
Max. Short Current ( A )	18 x 2				
No. of MPP Tracker / No. of PV String	2/2				
Input Connector Type	MC4				
AC Output Data	HNS3000TL	HNS3600TL	HNS4000TL	HNS5000TL	HNS6000TL
Max. Output Power ( W )	3300	3960	4400	5500	6600
Nominal Output Power ( W )	3000	3600	4000	5000	6000
Max. Output Current ( A )	15	17.5	20	24	28.7
Nominal Output Voltage ( V )	L/N/PE, 220Vac, 230Vac, 240Vac				
Grid Voltage Range	180Vac-276Vac (According to local standard)				
Nominal Output Frequency ( Hz )	50/60				
Grid Frequency Range	45-55Hz/54-66Hz (According to local standard)				
Output Power Factor	1 default (adjustable from 0.8 leading to 0.8 lagging)				
Output Current THD	<3%				
Efficiency	HNS3000TL	HNS3600TL	HNS4000TL	HNS5000TL	HNS6000TL
Max. Efficiency	98.20%	98.20%	98.20%	98.20%	98.20%
Euro Efficiency	97.80%	97.82%	97.85%	97.90%	97.92%
Protection	HNS3000TL	HNS3600TL	HNS4000TL	HNS5000TL	HNS6000TL
PV Reverse Polarity Protection	YES				
PV Insulation Resistance Detection	YES				
AC Short Circuit Protection	YES				
AC Over Current Protection	YES				
AC Over Voltage Protection	YES				
Anti-Islanding Protection	YES				
Residual Current Detection	YES				
Over Temperature Protection	YES				
Integrated DC switch	YES				
Surge Protection	Integrated (Type III)				
Smart IV Curve Scanning	YES				
Quick Arc Fault Circuit Interruption	Optional				
General Data	HNS3000TL	HNS3600TL	HNS4000TL	HNS5000TL	HNS6000TL
Dimensions (H x W x D, mm)	370 x 350 x 142				
Weight ( kg )	11				
Protection Degree	IP65				
Enclosure Material	Aluminum				
Ambient Temperature Range ( °C )	-25 to 60				
Humidity Range	0-100%				
Topology	Transformerless				
Communication Interface	RS485 / WiFi / Wire Ethernet / GPRS (optional)				
Cooling Concept	Convection				
Noise Emission ( db )	<28				
Night Power Consumption ( W )	<1				
Max. Operation Altitude ( m )	4000				
Certifications and Standards	HNS3000TL	HNS3600TL	HNS4000TL	HNS5000TL	HNS6000TL
EMC Standard	EN/IEC 61000-6-2, EN/IEC 61000-6-3, EN61000-3-2, EN61000-3-3, EN61000-3-11, EN61000-3-12				
Safety Standard	IEC 60068, UL1741, EN62109				
Grid-connection	IEEE1547, CSA C22, EN50549, VDE4105, VDE0126, RD1699, ABNT NBR16149 & 16150, AS4777.2, NB/T32004, G98/G99, IEC61727				

Residential HNS series

# HNS-TL

7-10 kW



The Afore HNS Series Single-phase inverters are designed for residential PV system applications, rating from 7kW to 10kW. All models have unibody housings with aluminum structure which is anodized, increasing durability and effectively prevents corrosion. Equipped with external inductors, the unibody housings can ensure efficient heat dissipation, which significantly improves the reliability and extends the life of the inverters.

The inverter menu is activated by sensor touch buttons. Communication implements are via the Wi-Fi module (can be changed to Ethernet / GPRS). Check the system status anytime and anywhere via online portal or APP.



**ANTI-FLOW**  
Anti-Feed-in Function



**PV OVERSIZE**  
Max. 1.5 time  
PV Oversize Capacity



**PROTECTION**  
Multiple intelligent  
Protections



**SMART**  
Smart IV Curve Scanning



**Wi-Fi**  
Wi-Fi Standard  
Ethernet/GPRS Optional



**CONFIGURATION**  
Quick & Easy  
Config. via Wi-Fi



**MODBUS**  
MODBUS  
Communication Ready

MPPT efficiency > 99.9%



No fans design

Two MPPT design



Quick and easy installation

Active and reactive power compensation, adjust power factor



High-quality power output and low THDI



PV Input Data	HNS7000TL	HNS8000TL	HNS9000TL	HNS10000TL
Max. DC Power ( W )	9800	11200	12600	14000
Max. DC Voltage ( V )	600			
MPPT Voltage Range ( V )	70-550			
MPPT Full Power Voltage Range ( V )	220-550			
Rated Input Voltage ( V )	360			
Start-up Voltage ( V )	70			
Max. Input Current ( A )	14+26		26+26	
Max. Short Current ( A )	18+35		35+35	
No. of MPP Tracker / No. of PV String	2/3		2/4	
Input Connector Type	MC4			

AC Output Data	HNS7000TL	HNS8000TL	HNS9000TL	HNS10000TL
Max. Output Power ( W )	7700	8800	9900	11000
Nominal Output Power ( W )	7000	8000	9000	10000
Max. Output Current ( A )	33.6	38.3	45	50
Nominal Output Voltage ( V )	L/N/PE, 220Vac, 230Vac, 240Vac			
Grid Voltage Range	180Vac-276Vac (According to local standard)			
Nominal Output Frequency ( Hz )	50/60			
Grid Frequency Range	45-55Hz/54-66Hz (According to local standard)			
Output Power Factor	1 default (adjustable from 0.8 leading to 0.8 lagging)			
Output Current THD	<3%			

Efficiency	HNS7000TL	HNS8000TL	HNS9000TL	HNS10000TL
Max. Efficiency	98.20%	98.20%	98.32%	98.40%
Euro Efficiency	97.95%	98.00%	98.00%	98.10%

Protection	HNS7000TL	HNS8000TL	HNS9000TL	HNS10000TL
PV Reverse Polarity Protection	YES			
PV Insulation Resistance Detection	YES			
AC Short Circuit Protection	YES			
AC Over Current Protection	YES			
AC Over Voltage Protection	YES			
Anti-Islanding Protection	YES			
Residual Current Detection	YES			
Over Temperature Protection	YES			
Integrated DC switch	YES			
Surge Protection	Integrated (Type III)			
Smart IV Curve Scanning	YES			
Quick Arc Fault Circuit Interruption	Optional			

General Data	HNS7000TL	HNS8000TL	HNS9000TL	HNS10000TL
Dimensions (H x W x D, mm)	510 x 370 x 167			
Weight ( kg )	17		19	
Protection Degree	IP65			
Enclosure Material	Aluminum			
Ambient Temperature Range (°C)	-25 to 60			
Humidity Range	0-100%			
Topology	Transformerless			
Communication Interface	RS485 / WiFi / Wire Ethernet / GPRS (optional)			
Cooling Concept	Convection			
Noise Emission ( db )	<40			
Night Power Consumption ( W )	<1			
Max. Operation Altitude ( m )	4000			

Certifications and Standards	HNS7000TL	HNS8000TL	HNS9000TL	HNS10000TL
EMC Standard	EN/IEC 61000-6-2, EN/IEC 61000-6-3, EN61000-3-2, EN61000-3-3, EN61000-3-11, EN61000-3-12			
Safety Standard	IEC 60068, UL1741, EN62109			
Grid-connection	IEEE1547, CSA C22, EN50549, VDE4105, VDE0126, RD1699, ABNT NBR16149 & 16150, AS4777.2, NB/T32004, G98/G99, IEC61727			

Commercial & Power Plants BNT series

# BNT

3-25 kW

# ATON

Series

## Smart | Safety | Efficient



The Afore BNT Series Three-phase string inverters are designed for residential and small commercial PV system applications, rating from 3kW to 25kW. All models have unibody housings with aluminum structure which is anodized, increasing durability and effectively prevents corrosion. Equipped with external inductors, the unibody housings can ensure efficient heat dissipation, which significantly improves the reliability and extends the life of the inverters.

Communication implements are via the Wi-Fi module (can be changed to Ethernet / GPRS). Check the system status anytime and anywhere via online portal or APP.

- Quick Arc Fault circuit interruption (Optional)
- WIFI standard
- Compact design
- Multiple intelligent protections
- Compatible with bifacial modules
- String level monitoring



**MPPT Range**  
Wide MPPT Range



**PV OVERSIZE**  
1.5 Times PV Oversize



**DC 1100V**  
Max. DC 1100V



**UNIBODY**  
One-piece  
Aluminum Housing



**PROTECTION**  
Build-in SPD Type II



**SMART**  
Smart IV Curve Scanning



**UPDATE**  
Remote Firmware Update

PV Input Data	BNT003KTL	BNT004KTL	BNT005KTL	BNT006KTL	BNT008KTL	BNT010KTL
Max. DC Power ( W )	5100	6000	7500	9000	12000	15000
Max. DC Voltage ( V )	1100					
MPPT Voltage Range ( V )	150 - 1000					
MPPT Full Power Voltage Range ( V )	200 - 850		250 - 850		300 - 850	500 - 850
Rated Input Voltage ( V )	620					
Start-up Voltage ( V )	150					
Max. Input Current ( A )	15 x 2					
Max. Short Current ( A )	25 x 2					
No. of MPP Tracker / No. of PV String	2/2					
Input Connector Type	MC4					

AC Output Data	BNT003KTL	BNT004KTL	BNT005KTL	BNT006KTL	BNT008KTL	BNT010KTL
Max. Output Power ( W )	3300	4400	5500	6600	8800	11000
Nominal Output Power ( W )	3000	4000	5000	6000	8000	10000
Max. Output Current ( A )	5.3	7	8.5	10.5	13.5	17
Nominal Output Voltage ( V )	3P+N+PE /3P+PE 230/400					
Grid Voltage Range	260Vac-519Vac (according to local standard)					
Nominal Output Frequency ( Hz )	50/60					
Grid Frequency Range	45-55Hz/55-65Hz(according to local standard)					
Output Power Factor	1 default (adjustable from 0.8 leading to 0.8 lagging)					
Output Current THD	<3%					

Efficiency	BNT003KTL	BNT004KTL	BNT005KTL	BNT006KTL	BNT008KTL	BNT010KTL
Max. Efficiency	98.30%					98.70%
Euro Efficiency	97.61%	97.65%	98.00%	98.05%		98.23%

Protection	BNT003KTL	BNT004KTL	BNT005KTL	BNT006KTL	BNT008KTL	BNT010KTL
PV Reverse Polarity Protection	YES					
PV Insulation Resistance Detection	YES					
AC Short Circuit Protection	YES					
AC Over Current Protection	YES					
AC Over Voltage Protection	YES					
Anti-Islanding Protection	YES					
Residual Current Detection	YES					
Over Temperature Protection	YES					
Integrated DC switch	YES					
Surge Protection	Integrated (Type II)					
Smart IV Curve Scanning	YES					
Quick Arc Fault Circuit Interruption	Optional					

General Data	BNT003KTL	BNT004KTL	BNT005KTL	BNT006KTL	BNT008KTL	BNT010KTL
Dimensions (H x W x D, mm)	510 x 370 x 167			510 x 370 x 192		
Weight ( kg )	16			15		
Protection Degree	IP65					
Enclosure Material	Aluminum					
Ambient Temperature Range (°C)	-25 to 60					
Humidity Range	0 -100%					
Topology	Transformerless					
Communication Interface	RS485 / WiFi / Wire Ethernet / GPRS (optional)					
Cooling Concept	Convection			Intelligent fan cooling		
Noise Emission ( db )	<30					
Night Power Consumption ( W )	<1					
Max. Operation Altitude ( m )	≤4000					

Certifications and Standards	BNT003KTL	BNT004KTL	BNT005KTL	BNT006KTL	BNT008KTL	BNT010KTL
EMC Standard	EN/IEC 61000-6-2, EN/IEC 61000-6-3, EN61000-3-2, EN61000-3-3, EN61000-3-11, EN61000-3-12					
Safety Standard	IEC 60068, UL1741, EN62109					
Grid-connection	IEEE1547, CSA C22, EN50549, VDE4105, VDE0126, RD1699, ABNT NBR16149 & 16150, AS4777.2, NB/T32004, G98/G99, IEC61727					

PV Input Data	BNT012KTL	BNT013KTL	BNT015KTL	BNT017KTL	BNT020KTL	BNT025KTL
Max. DC Power ( W )	18000	19500	22500	25500	30000	37500
Max. DC Voltage ( V )	1100					
MPPT Voltage Range ( V )	150 - 1000					
MPPT Full Power Voltage Range ( V )	500 - 850					
Rated Input Voltage ( V )	620					
Start-up Voltage ( V )	150					
Max. Input Current ( A )	15 x 2		20 + 32		32 x 2	
Max. Short Current ( A )	25 x 2		30 + 48		48 x 2	
No. of MPP Tracker / No. of PV String	2/2		2/3		2/4	
Input Connector Type	MC4					

AC Output Data	BNT012KTL	BNT013KTL	BNT015KTL	BNT017KTL	BNT020KTL	BNT025KTL
Max. Output Power ( W )	13200	14300	16500	18700	22000	27500
Nominal Output Power ( W )	12000	13000	15000	17000	20000	25000
Max. Output Current ( A )	21.5	22	27	30	32	40
Nominal Output Voltage ( V )	3P+N+PE /3P+PE 230/400					
Grid Voltage Range	260Vac-519Vac (according to local standard)					
Nominal Output Frequency ( Hz )	50/60					
Grid Frequency Range	45-55Hz/55-65Hz(according to local standard)					
Output Power Factor	1 default (adjustable from 0.8 leading to 0.8 lagging)					
Output Current THD	<3%					

Efficiency	BNT012KTL	BNT013KTL	BNT015KTL	BNT017KTL	BNT020KTL	BNT025KTL
Max. Efficiency	98.70%			98.75%		
Euro Efficiency	98.23%			98.35%		

Protection	BNT012KTL	BNT013KTL	BNT015KTL	BNT017KTL	BNT020KTL	BNT025KTL
PV Reverse Polarity Protection	YES					
PV Insulation Resistance Detection	YES					
AC Short Circuit Protection	YES					
AC Over Current Protection	YES					
AC Over Voltage Protection	YES					
Anti-Islanding Protection	YES					
Residual Current Detection	YES					
Over Temperature Protection	YES					
Integrated DC switch	YES					
Surge Protection	Integrated (Type II)					
Smart IV Curve Scanning	YES					
Quick Arc Fault Circuit Interruption	Optional					

General Data	BNT012KTL	BNT013KTL	BNT015KTL	BNT017KTL	BNT020KTL	BNT025KTL
Dimensions (H x W x D, mm)	510 x 370 x 192			535 x 370 x 192		
Weight ( kg )	15	17		19		
Protection Degree	IP65					
Enclosure Material	Aluminum					
Ambient Temperature Range (°C)	-25 to 60					
Humidity Range	0 -100%					
Topology	Transformerless					
Communication Interface	RS485 / WiFi / Wire Ethernet / GPRS (optional)					
Cooling Concept	Intelligent fan cooling					
Noise Emission ( db )	<40					<51
Night Power Consumption ( W )	<1					
Max. Operation Altitude ( m )	≤4000					

Certifications and Standards	BNT012KTL	BNT013KTL	BNT015KTL	BNT017KTL	BNT020KTL	BNT025KTL
EMC Standard	EN/IEC 61000-6-2, EN/IEC 61000-6-3, EN61000-3-2, EN61000-3-3, EN61000-3-11, EN61000-3-12					
Safety Standard	IEC 60068, UL1741, EN62109					
Grid-connection	IEEE1547, CSA C22, EN50549, VDE4105, VDE0126, RD1699, ABNT NBR16149 & 16150, AS4777.2, NB/T32004, G98/G99, IEC61727					

Commercial & Power Plants BNT series

# BNT

## 30-60 kW



The Afore BNT Series Three-phase string inverters are designed for commercial and power plant PV system applications, rating from 30kW to 60kW. All models with aluminum housings which is anodized, increasing durability and effectively prevents corrosion. Equipped with external inductors, ensure efficient heat dissipation, which significantly improves the reliability and extends the life of the inverters.

The inverter menu is activated by sensor touch buttons. Communication implements are via the Wi-Fi module (can be changed to Ethernet / GPRS). Check the system status anytime and anywhere via online portal or APP.

Max.  
**20A**

**MAX. 20Adc**  
String Current Up To 20A

Max.  
**1.5**

**PV OVERSIZE**  
Max. 1.5 Time  
PV Oversize Input



**PROTECTION**  
Multiple Intelligent  
Protections



**ANTI-FLOW**  
Anti-Feed-in Function



**Wi-Fi**  
Wi-Fi Standard,  
Ethernet/GPRS Optional



**CONFIGURATION**  
Quick & Easy  
Config. via Wi-Fi



**MODBUS**  
MODBUS  
Communication Ready

MPPT efficiency > 99.9%



Intelligent Temperature Control System



Active and reactive power compensation, adjust power factor



IP 68 Cooling Fan



Type II DC & AC lightning protection



AC output 1.1x continuous operation

PV Input Data	BNT030KTL	BNT036KTL	BNT040KTL	BNT050KTL	BNT060KTL
Max. DC Power ( W )	45000	54000	60000	75000	90000
Max. DC Voltage ( V )	1100				
MPPT Voltage Range ( V )	200 -1000				
MPPT Full Power Voltage Range ( V )	500 - 850				
Rated Input Voltage ( V )	620				
Start-up Voltage ( V )	200				
Max. Input Current ( A )	38 x3		40 x3		38 x4
Max. Short Current ( A )	48 x3		48 x3		48 x4
No. of MPP Tracker / No. of PV String	3/6		3/7		4/8
Input Connector Type	MC4				
AC Output Data	BNT030KTL	BNT036KTL	BNT040KTL	BNT050KTL	BNT060KTL
Max. Output Power ( W )	33000	39600	44000	55000	66000
Nominal Output Power ( W )	30000	36000	40000	50000	60000
Max. Output Current ( A )	48	60	65	80	96
Nominal Output Voltage ( V )	3P+N+PE /3P+PE 230/400				
Grid Voltage Range	260Vac-519Vac (according to local standard)				
Nominal Output Frequency ( Hz )	50/60				
Grid Frequency Range	45-55Hz/55-65Hz (according to local standard)				
Output Power Factor	1 default (adjustable from 0.8 leading to 0.8 lagging)				
Output Current THD	<3%				
Efficiency	BNT030KTL	BNT036KTL	BNT040KTL	BNT050KTL	BNT060KTL
Max. Efficiency	98.50%	98.65%	98.65%	98.80%	99.00%
Euro Efficiency	98.10%	98.20%	98.25%	98.45%	98.50%
Protection	BNT030KTL	BNT036KTL	BNT040KTL	BNT050KTL	BNT060KTL
PV Reverse Polarity Protection	YES				
PV Insulation Resistance Detection	YES				
AC Short Circuit Protection	YES				
AC Over Current Protection	YES				
AC Over Voltage Protection	YES				
Anti-Islanding Protection	YES				
Residual Current Detection	YES				
Over Temperature Protection	YES				
Integrated DC switch	YES				
Surge Protection	Integrated (Type II)				
Smart IV Curve Scanning	YES				
Quick Arc Fault Circuit Interruption	Optional				
General Data	BNT030KTL	BNT036KTL	BNT040KTL	BNT050KTL	BNT060KTL
Dimensions (H x W x D, mm)	712 x 427 x 232				
Weight ( kg )	42		43	45	51
Protection Degree	IP65				
Enclosure Material	Aluminum				
Ambient Temperature Range ( °C )	-25 to 60				
Humidity Range	0-100%				
Topology	Transformerless				
Communication Interface	RS485 / WiFi / Wire Ethernet / GPRS (optional)				
Cooling Concept	Intelligent Fan Cooling				
Noise Emission ( db )	<51		<55		
Night Power Consumption ( W )	<1				
Max. Operation Altitude ( m )	≤4000				
Certifications and Standards	BNT030KTL	BNT036KTL	BNT040KTL	BNT050KTL	BNT060KTL
EMC Standard	EN/IEC 61000-6-2, EN/IEC 61000-6-3, EN61000-3-2, EN61000-3-3, EN61000-3-11, EN61000-3-12				
Safety Standard	IEC 60068, UL1741, EN62109				
Grid-connection	IEEE1547, CSA C22, EN50549, VDE4105, VDE0126, RD1699, ABNT NBR16149 & 16150, AS4777.2, NB/T32004, G98/G99, IEC61727				

# Single Phase Hybrid Inverter

1 - 6 kW for Low Voltage Battery




The Afore AF low voltage Series storage Inverters are designed to increase energy independence for homeowners. The power range is from 1kW to 6kW, compatible with low voltage (40-60V) batteries.

Energy management is based on time-of-use and demand charge rate structures, significantly reduce the amount of energy purchased from the public grid.



Thanks for the UPS function (switch time < 10ms), enables the crucial loads power on during outages. Additionally, under the backup operation mode, the inverter provides you up to 150% peak output overloading.

The AF low voltage Series storage inverters integrated with Arc Fault Circuit Interrupter (AFCI) and Rapid Shutdown.

For New Storage System:

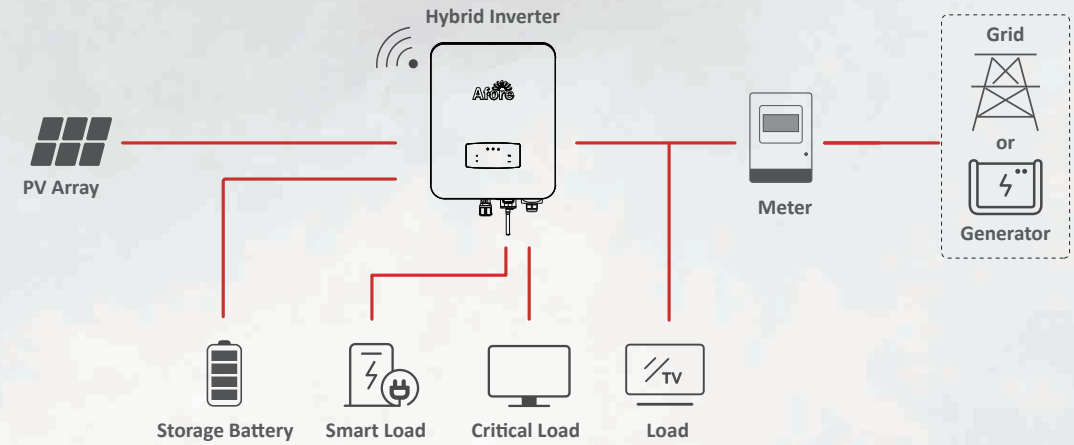


Optimizing Self-Consumption (on-grid) + Emergency Power Supply(off-grid)

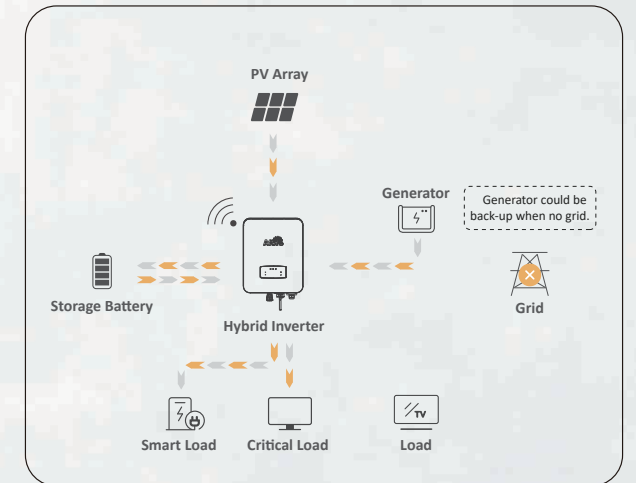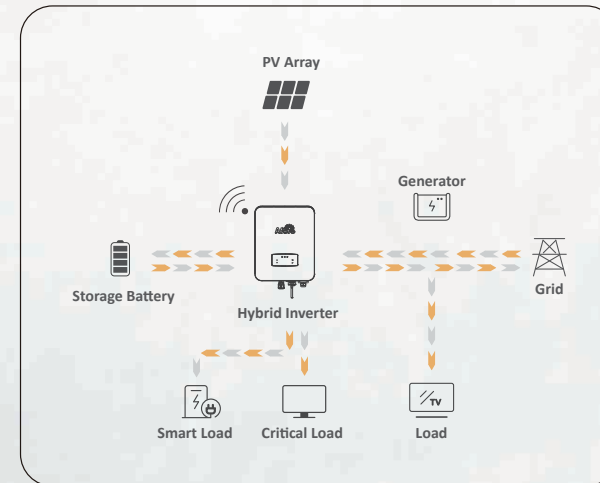

## Optimizing Self-Consumption Mode

With home energy storage installed, home owners may also be able to change from a flat rate electricity tariff to a time-of-use tariff. For the areas and regions, where peak shaving can be applied.

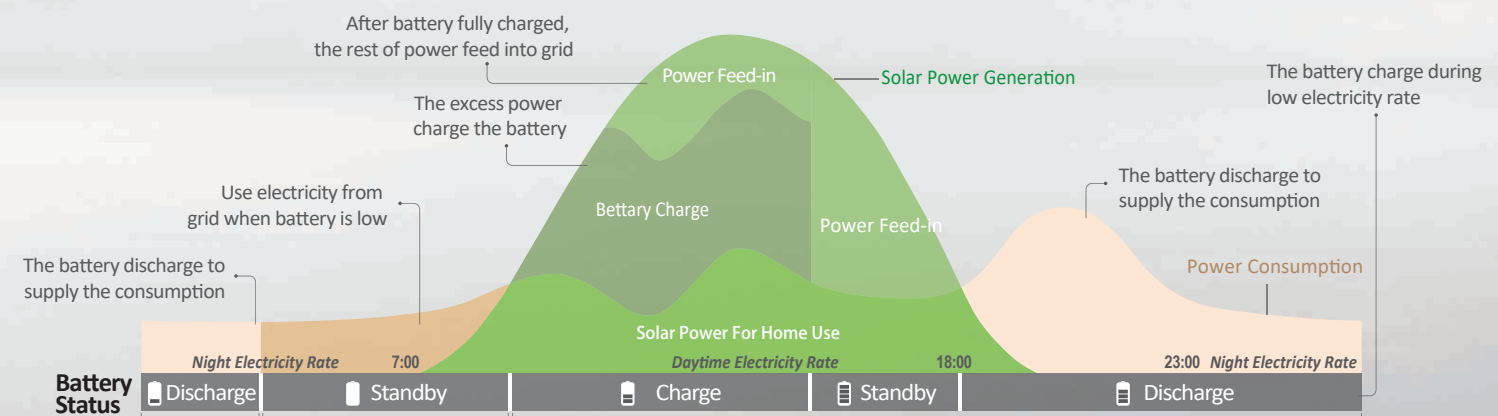

**Max. 1.5**

**PV OVERSIZE**  
1.5 Times PV Oversize

**2 MPPT**

**MPPT CHANNELS**  
Up to 2 MPPT Channels

**<10 ms**

**UPS FUNCTION**  
Switch Time < 10ms

**PARALLEL**

**PARALLEL**  
Max.6 Parallel Stacking

**INPUT**

**SUPPORT GENERATOR**

Support for Time-of-use Optimization

Configurable Operation Modes

Arc Fault Circuit Interrupter (AFCI) (Optional)

Build in Anti-feed-in Function

Compact Size and Easy Installation

Smart Monitoring & Remote Firmware Upgrade

PV Input	AF1K-SL-1	AF1.5K-SL-1	AF2K-SL-1	AF2.5K-SL-1	AF3K-SL-1	AF3.6K-SL-1
Max. Input Power (kW)	1.5	2.3	3.0	3.8	4.5	5.4
Max. PV Voltage (V)	550					
MPPT Range (V)	80 - 500					
Full MPPT Range (V)	80 - 500	90 - 500	120 - 500	150 - 500	170 - 500	210 - 500
Normal Voltage (V)	360					
Startup Voltage (V)	100					
Max. Input Current (A)	18.5 x 1					
Max. Short Current (A)	26 x 1					
No. of MPP Tracker / No. of PV String	1 / 1					
Battery Port						
Max. Charge/Discharge Power (kW)	1.0	1.5	2.0	2.5	3.0	3.6
Max. Charge/Discharge Current (A)	25	40	50	63	80	80
Battery Normal Voltage (V)	51.2					
Battery Voltage Range (V)	40 - 60					
Battery Type	Li-ion / Lead-acid etc.					
AC Grid						
Max Continuous Current (A)	5.0	7.0	10.0	12.0	14.0	17.0
Max Continuous Power (kVA)	1.0	1.5	2.0	2.5	3.0	3.6
Nominal Grid Current(A)	4.6 / 4.4	6.9 / 6.6	9.1 / 8.7	11.4 / 10.9	13.7 / 13.1	16.4 / 15.7
Nominal Grid Voltage (V)	198 to 242 @ 220 / 207 to 253 @ 230					
Nominal Grid Frequency (Hz)	50 / 60					
Power Factor	0.999 (Adjustable from 0.8 overexcited to 0.8 underexcited)					
Current THD (%)	< 3					
AC Load Output	AF1K-SL-1	AF1.5K-SL-1	AF2K-SL-1	AF2.5K-SL-1	AF3K-SL-1	AF3.6K-SL-1
Max Continuous Current (A)	5.0	7.0	10.0	12.0	14.0	17.0
Max Continuous Power (kVA)	1.0	1.5	2.0	2.5	3.0	3.6
Max Peak Current (A) (10min)	6.9 / 6.6	10.5 / 10.0	13.7 / 13.1	17.3 / 16.6	20.5 / 19.6	24.6 / 23.5
Max Peak Power (kVA) (10min)	1.5	2.3	3.0	3.8	4.5	5.4
Nominal AC Current (A)	4.6 / 4.4	6.9 / 6.6	9.1 / 8.7	11.4 / 10.9	13.7 / 13.1	16.4 / 15.7
Nominal AC Voltage L-N (V)	220 / 230					
Nominal AC Frequency (Hz)	50 / 60					
Switching Time (s)	Seamless					
Voltage THD (%)	< 3					
Efficiency						
CEC Efficiency (%)	97.0					
Max. Efficiency (%)	97.6					
PV to Bat. Efficiency (%)	98.1					
Bat. between AC Efficiency (%)	96.8					
Protection	AF1K-SL-1	AF1.5K-SL-1	AF2K-SL-1	AF2.5K-SL-1	AF3K-SL-1	AF3.6K-SL-1
PV Reverse Polarity Protection	Yes					
Over Current/Voltage Protection	Yes					
Anti-Islanding Protection	Yes					
AC Short Circuit Protection	Yes					
Residual Current Detection	Yes					
Ground Fault Monitoring	Yes					
Insulation Resister Detection	Yes					
PV Arc Detection	Yes					
Enclosure Protect Level	IP65 / NEMA4X					
General Data	AF1K-SL-1	AF1.5K-SL-1	AF2K-SL-1	AF2.5K-SL-1	AF3K-SL-1	AF3.6K-SL-1
Dimensions (L x W x H, mm)	513 x 370 x 192					
Weight (kg)	17					
Topology	Transformerless					
Cooling	Intelligent Fan					
Relatively Humidity	0 - 100 %					
Operating Temperature Range (°C)	- 25 to 60					
Operating Altitude (m)	< 4000					
Noise Emission (dB)	< 25					
Standby Consumption (W)	< 10					
Mounting	Wall Bracket					
Communication with RSD	SUNSPEC					
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G					
Certification & Approvals	NRS97, G98/G99, EN50549-1, C10/C11, AS 4777, VDE-AR-N4105, VDE0126, IEC62040, IEC62109-1, IEC62109-2					
EMC	EN61000-6-2, EN61000-6-3					

PV Input	AF3K-SL	AF3.6K-SL	AF4K-SL	AF4.6K-SL	AF5K-SL	AF5.5K-SL	AF6K-SL
Max. Input Power (kW)	4.5	5.4	6.0	6.9	7.5	8.3	9.0
Max. PV Voltage (V)	550						
MPPT Range (V)	80 - 500						
Full MPPT Range (V)	90 - 500	110 - 500	120 - 500	130 - 500	150 - 500	160 - 500	170 - 500
Normal Voltage (V)	360						
Startup Voltage (V)	100						
Max. Input Current (A)	18.5 x 2						
Max. Short Current (A)	26 x 2						
No. of MPP Tracker / No. of PV String	2 / 2						
Battery Port							
Max. Charge/Discharge Power (kW)	3.0	3.6	4.0	4.6	4.8	4.8	4.8
Max. Charge/Discharge Current (A)	80						
Battery Normal Voltage (V)	51.2						
Battery Voltage Range (V)	40 - 60						
Battery Type	Li-ion / Lead-acid etc.						
AC Grid							
Max Continuous Current (A)	14.0	17.0	19.0	22.0	23.0	26.0	28.0
Max Continuous Power (kVA)	3.0	3.6	4.0	4.6	5.0	5.5	6.0
Nominal Grid Current(A)	13.7 / 13.1	16.4 / 15.7	18.2 / 17.4	21.0 / 20.0	22.8 / 21.8	25.0 / 24.0	27.3 / 26.1
Nominal Grid Voltage (V)	198 to 242 @ 220 / 207 to 253 @ 230						
Nominal Grid Frequency (Hz)	50 / 60						
Power Factor	0.999 (Adjustable from 0.8 overexcited to 0.8 underexcited)						
Current THD (%)	< 3						
AC Load Output	AF3K-SL	AF3.6K-SL	AF4K-SL	AF4.6K-SL	AF5K-SL	AF5.5K-SL	AF6K-SL
Max Continuous Current (A)	14.0	17.0	19.0	22.0	23.0	26.0	28.0
Max Continuous Power (kVA)	3.0	3.6	4.0	4.6	5.0	5.5	6.0
Max Peak Current (A) (10min)	20.5 / 19.6	24.6 / 23.5	27.3 / 26.1	31.4 / 30	34.1 / 32.7	37.8 / 36.1	41.0 / 39.2
Max Peak Power (kVA) (10min)	4.5	5.4	6.0	6.9	7.5	8.3	9.0
Nominal AC Current (A)	13.7 / 13.1	16.4 / 15.7	18.2 / 17.4	21.0 / 20.0	22.8 / 21.8	25.0 / 24.0	27.3 / 26.1
Nominal AC Voltage L-N (V)	220 / 230						
Nominal AC Frequency (Hz)	50 / 60						
Switching Time (s)	Seamless						
Voltage THD (%)	< 3						
Efficiency							
CEC Efficiency (%)	97.0						
Max. Efficiency (%)	97.6						
PV to Bat. Efficiency (%)	98.1						
Bat. between AC Efficiency (%)	96.8						
Protection	AF3K-SL	AF3.6K-SL	AF4K-SL	AF4.6K-SL	AF5K-SL	AF6K-SL	AF6K-SL
PV Reverse Polarity Protection	Yes						
Over Current/Voltage Protection	Yes						
Anti-Islanding Protection	Yes						
AC Short Circuit Protection	Yes						
Residual Current Detection	Yes						
Ground Fault Monitoring	Yes						
Insulation Resister Detection	Yes						
PV Arc Detection	Yes						
Enclosure Protect Level	IP65 / NEMA4X						
General Data	AF3K-SL	AF3.6K-SL	AF4K-SL	AF4.6K-SL	AF5K-SL	AF6K-SL	AF6K-SL
Dimensions (L x W x H, mm)	513 x 370 x 192						
Weight (kg)	17						
Topology	Transformerless						
Cooling	Intelligent Fan						
Relatively Humidity	0 - 100 %						
Operating Temperature Range (°C)	- 25 to 60						
Operating Altitude (m)	< 4000						
Noise Emission (dB)	< 25						
Standby Consumption (W)	< 10						
Mounting	Wall Bracket						
Communication with RSD	SUNSPEC						
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G						
Certification & Approvals	NRS97, G98/G99, EN50549-1, C10/C11, AS 4777, VDE-AR-N4105, VDE0126, IEC62040, IEC62109-1, IEC62109-2						
EMC	EN61000-6-2, EN61000-6-3						

# Three phase Hybrid Inverter

3-30kW




The Afore AF Series three phase storage inverters are designed to increase energy independence for homeowners and commercial users. The power range is from 3.0kW to 30kW, compatible with high voltage (150-800V) batteries.



Energy management is based on time-of-use and demand charge rate structures, significantly reduce the amount of energy purchased from public grid.

Thanks for the UPS function (switch time < 10ms), enables the crucial loads power on during outages. Additionally, under the backup operation mode, the inverter provides you up to 150% peak output overloading.

## For New Storage System:

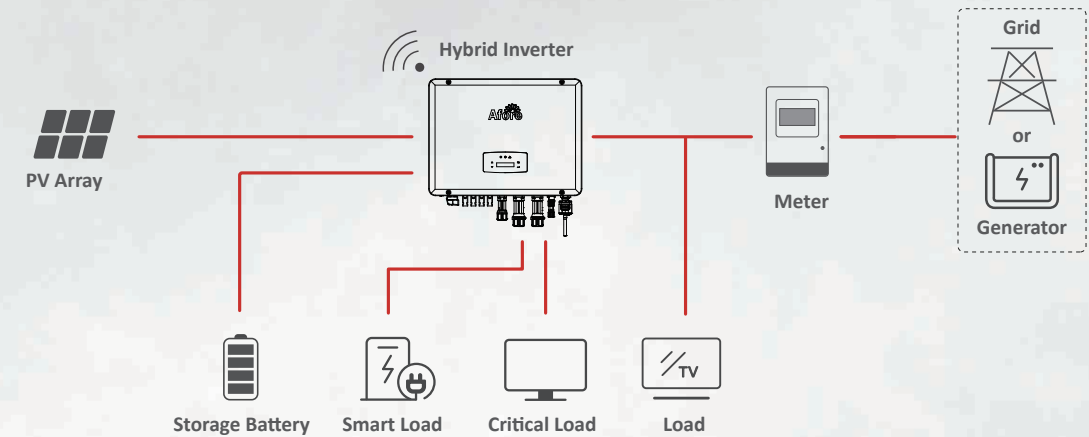


## Optimizing Self-Consumption (on-grid) + Emergency Power Supply(off-grid)

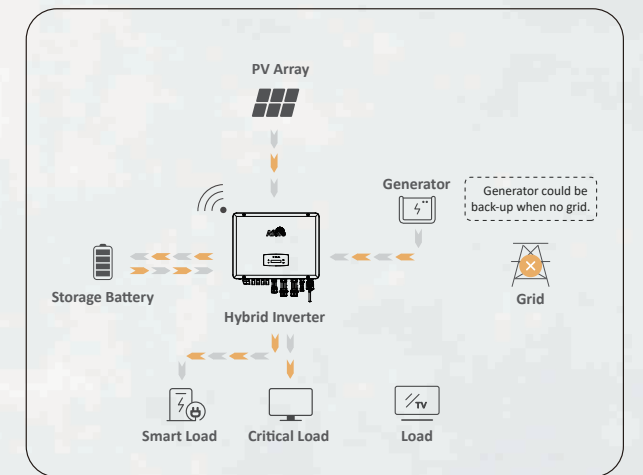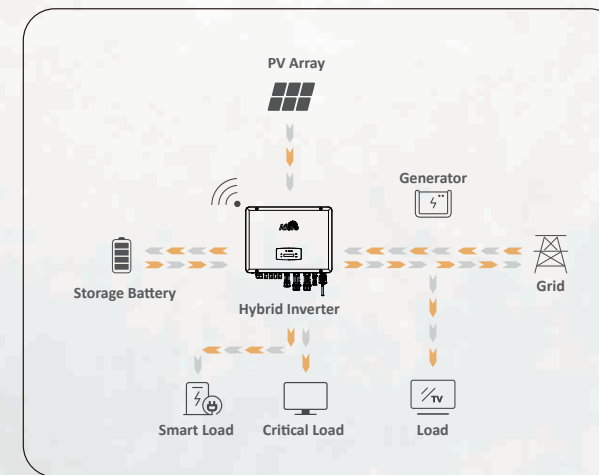

## Optimizing Self-Consumption Mode

With energy storage system installed, users may also be able to change from a flat rate electricity tariff to a time-of-use tariff. For the areas and regions, where peak shaving can be applied.

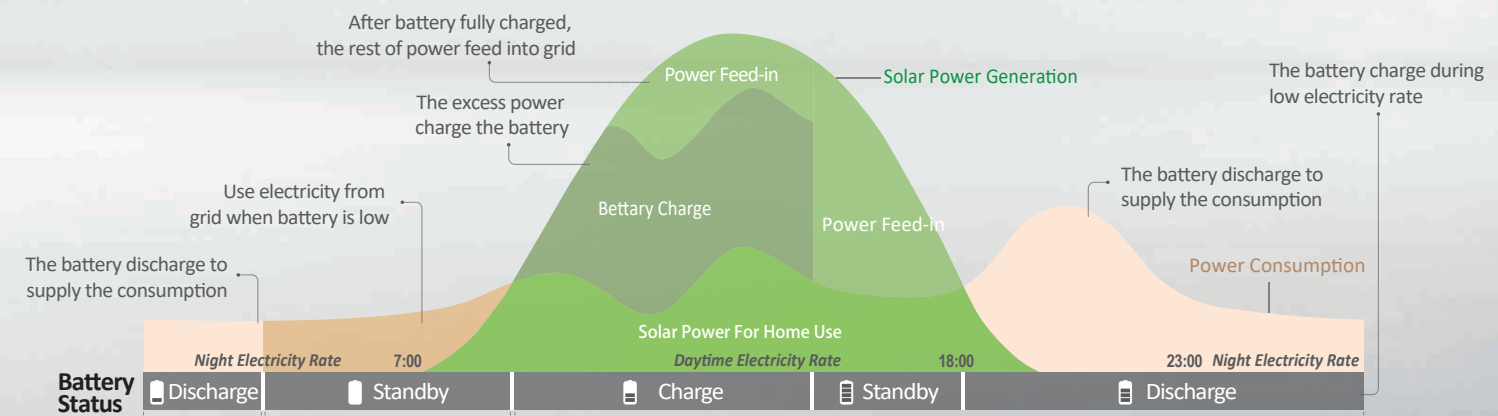

**WIDE RANGE**  
Voltage Range  
(150-800V)



**UNBALANCE**  
Support Unbalance Load



**PV OVERSIZE**  
1.5 Times PV Oversize



**MAX. 40A**  
String Current Up To 40A



**UPS FUNCTION**  
Switch Time < 10ms



**INPUT**  
Support Generator

Support for Time-of-use Optimization

Configurable Operation Modes

AFCI (Optional) & Rapid Shutdown Ready

Build in Anti-feed-in Function

100% unbalanced output, each phase;  
200% unbalanced output, each phase (Below 10kW)

Smart Monitoring & Remote Firmware Upgrade



PV Input	AF3K-TH	AF4K-TH	AF5K-TH	AF6K-TH	AF8K-TH	AF10K-TH
Max. DC Input Power (kW)	5	6	7.5	9	12	15
Max. PV Voltage (V)	1000					
Rated DC Input Voltage (V)	620					
DC Input Voltage Range (V)	150 - 1000					
MPPT Voltage Range (V)	150 - 850					
Full MPPT Range(V)	200 - 850		250 - 850		300 - 850	500 - 850
Start-up Voltage (V)	160					
Max. DC Input Current (A)	20x2					
Max. Short Current(A)	30x2					
No. of MPPT Tracker / Strings	2/2					
Battery Port						
Battery Nominal Voltage (V)	200	200	200	250	300	400
Battery Voltage Range (V)	150 - 800					
Max. Charge/Discharge Current (A)	30					
Max. Charge/Discharge Power (W)	3K	4K	5K	6K	8K	10K
Charging Curve	3 Stages					
Compatible Battery Type	Li-ion / Lead-acid					
AC Grid Output	AF3K-TH	AF4K-TH	AF5K-TH	AF6K-TH	AF8K-TH	AF10K-TH
Nominal AC Output Power (VA)	3000	4000	5000	6000	8000	10000
Max. AC Input Power	4500	6000	7500	9000	12000	15000
Max. AC Output Current (A)	5.3	7	8.5	10.5	13.5	17
Nominal AC Voltage (V)	230/400					
Nominal AC Frequency (Hz)	50/60					
Power Factor	1 (-0.8 - 0.8)					
Current THD (%)	<3%					
AC Load Output (Back-up)						
Nominal Output Power (VA)	3000	4000	5000	6000	8000	10000
Nominal Output Voltage (V)	230/400					
Nominal Output Frequency (Hz)	50/60					
Nominal Output Current (A)	4.4	5.8	7.3	8.7	11.6	14.5
Peak Output Power	3300VA, 60s	4400VA, 60s	5500VA, 60s	6600VA, 60s	8800VA, 60s	11000VA, 60s
THDV (with linear load)	<3%					
Switching Time (ms)	<10					
Efficiency	AF3K-TH	AF4K-TH	AF5K-TH	AF6K-TH	AF8K-TH	AF10K-TH
Europe Efficiency	97.50%					
Max. Efficiency	98.00%			98.20%		
Battery Charge/Discharge Efficiency	98.00%					
Protection						
Reverse Polarity Protection	Yes					
Over Current / Voltage Protection	Yes					
Anti-islanding Protection	Yes					
AC Short-circuit Protection	Yes					
Leakage Current Detection	Yes					
Ground Fault Monitoring	Yes					
Grid Monitoring	Yes					
Enclosure Protect Level	IP65					
General Data	AF3K-TH	AF4K-TH	AF5K-TH	AF6K-TH	AF8K-TH	AF10K-TH
Dimensions (H x W x D) (mm)	588 x 426 x 250 mm					
Weight (kg)	20kg			22kg		
Topology	Transformerless					
Cooling Concept	Natural Convection			Intelligent Fan		
Relatively Humidity	0 - 100%					
Operating Temperature Range (°C)	-25 to 60 °C					
Operating Altitude (m)	<4000					
Noise Emission (dB)	<30					
Standby Consumption (W)	<5					
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G					
Certification & Approvals	NRS97, G98/G99, EN50549-1, C10/C11, AS 4777, VDE-AR-N4105, VDE0126, IEC62040, IEC62109-1, IEC62109-2					
EMC	EN61000-6-2, EN61000-6-3					

PV Input	AF12K-TH	AF15K-TH	AF17K-TH	AF20K-TH	AF25K-TH	AF30K-TH
Max. DC Input Power (kW)	18	22.5	25.5	30	37.5	45
Max. PV Voltage (V)	1000					
Rated DC Input Voltage (V)	620					
DC Input Voltage Range (V)	150 - 1000					
MPPT Voltage Range (V)	150 - 850					
Full MPPT Range(V)	500 - 850					
Start-up Voltage (V)	160					
Max. DC Input Current (A)	20x2	20+32	32x2		40x2	
Max. Short Current(A)	30x2	30+48	48x2		60x2	
No. of MPPT Tracker / Strings	2/2	2/3	2/4		2/4	
Battery Port						
Battery Nominal Voltage (V)	450	500	400	500	500	550
Battery Voltage Range (V)	150 - 800					
Max. Charge/Discharge Current (A)	30	50	50	50	60	60
Max. Charge/Discharge Power (W)	12K	15K	17K	20K	25K	30K
Charging Curve	3 Stages					
Compatible Battery Type	Li-ion / Lead-acid					
AC Grid Output	AF12K-TH	AF15K-TH	AF17K-TH	AF20K-TH	AF25K-TH	AF30K-TH
Nominal AC Output Power (VA)	12000	15000	17000	20000	25000	30000
Max. AC Input Power	18000	22500	25500	30000	37500	45000
Max. AC Output Current (A)	21.5	27	30	32	40	48
Nominal AC Voltage (V)	230/400					
Nominal AC Frequency (Hz)	50/60					
Power Factor	1 (-0.8 - 0.8)					
Current THD (%)	<3%					
AC Load Output (Back-up)						
Nominal Output Power (VA)	12000	15000	17000	20000	25000	30000
Nominal Output Voltage (V)	230/400					
Nominal Output Frequency (Hz)	50/60					
Nominal Output Current (A)	17.4	21.8	24.8	29	36.3	43.5
Peak Output Power	13200VA, 60s	16500VA, 60s	18700VA, 60s	22000VA, 60s	27500VA, 60s	33000VA, 60s
THDV (with linear load)	<3%					
Switching Time (ms)	<10					
Efficiency	AF12K-TH	AF15K-TH	AF17K-TH	AF20K-TH	AF25K-TH	AF30K-TH
Europe Efficiency	97.50%		97.80%		98.00%	98.10%
Max. Efficiency	98.30%			98.50%		
Battery Charge/Discharge Efficiency	98.00%					
Protection						
Reverse Polarity Protection	Yes					
Over Current / Voltage Protection	Yes					
Anti-islanding Protection	Yes					
AC Short-circuit Protection	Yes					
Leakage Current Detection	Yes					
Ground Fault Monitoring	Yes					
Grid Monitoring	Yes					
Enclosure Protect Level	IP65					
General Data	AF12K-TH	AF15K-TH	AF17K-TH	AF20K-TH	AF25K-TH	AF30K-TH
Dimensions (H x W x D) (mm)	588 x 426 x 250 mm					
Weight (kg)	22kg	28kg		35kg		
Topology	Transformerless					
Cooling Concept	Intelligent Fan					
Relatively Humidity	0 - 100%					
Operating Temperature Range (°C)	-25 to 60 °C					
Operating Altitude (m)	<4000					
Noise Emission (dB)	<30	<40				
Standby Consumption (W)	<5					
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G					
Certification & Approvals	NRS97, G98/G99, EN50549-1, C10/C11, AS 4777, VDE-AR-N4105, VDE0126, IEC62040, IEC62109-1, IEC62109-2					
EMC	EN61000-6-2, EN61000-6-3					

# AC Coupled Inverter

1-4.6 kW



Afore AC Coupled Inverter (1kW-4.6kW) suitable for both single-phase & three-phase systems. It can be fitted alongside string inverter, enabling you to upgrade to solar battery storage system without changing your current installation.

- 

**SEAMLESSLY SWITCH**  
Seamlessly Switch Time between EPS with Grid
- 


**SMART**  
Smart EMS/BMS
- 


**UNIBODY**  
One-piece Aluminum Housing
- 


**SAFETY**  
Proven Safety
- 


**Max. 80A**  
Max. 80A Battery Charge and Discharge Current
- 

**SUPPORT**  
Island support

- 

97.6% High Frequency Isolation Charge and Discharge Efficiency
- 

Integrated WIFI Monitoring & Remote Parameter Setting
- 


Plug & Play, Easy Maintenance
- 

IP 65 Water-resistant & Dustproof


## Retrofitting Storage Solution on Existing Solar System:

Adding battery storage to an existing solar system enables home owners to store their solar PV generated electricity instead of exporting it to the grid. More savings on your electricity bill.

### Single Phase AC Coupled (Retro Fit)

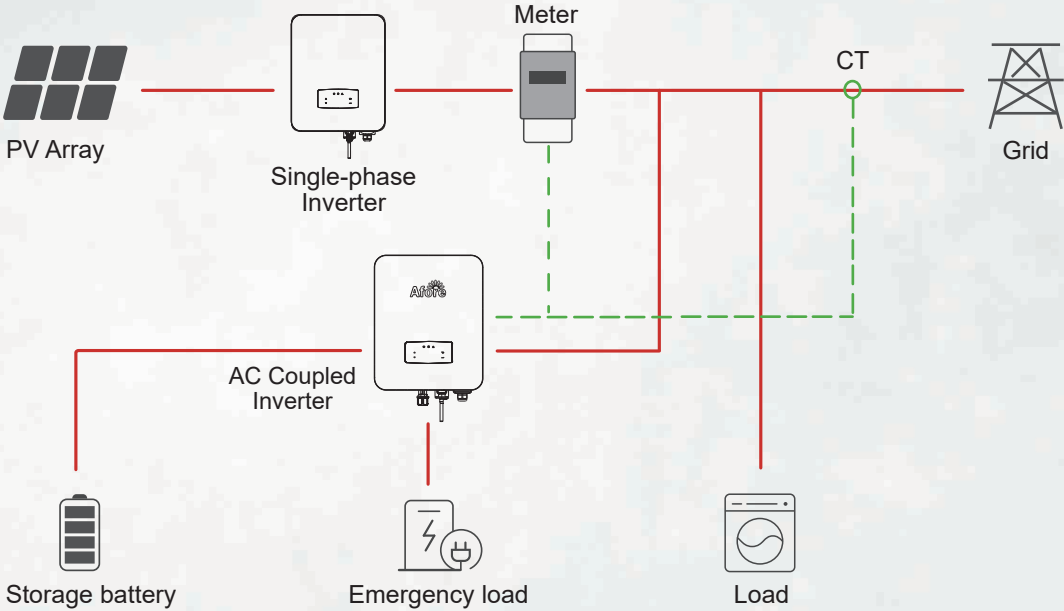

### Three Phase AC Coupled (Retro Fit)

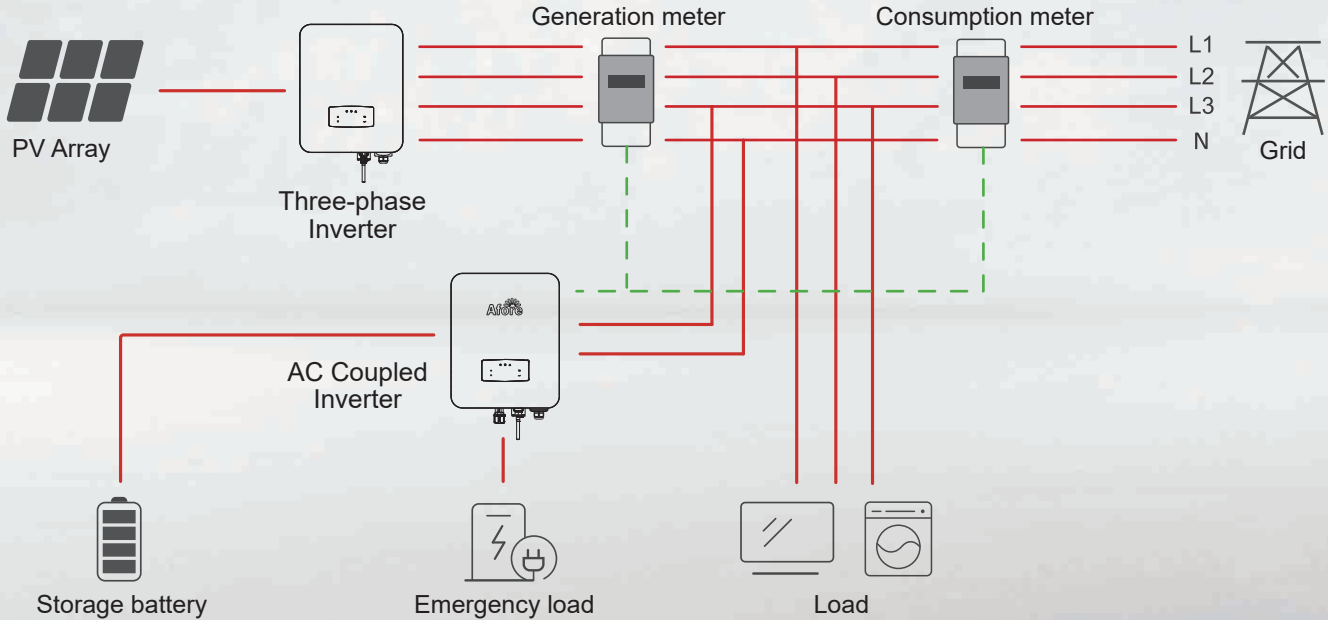

Battery	AF1K-SL-0	AF1.5K-SL-0	AF2K-SL-0	AF2.5K-SL-0
Max. Charge/Discharge Power (kW)	1	1.5	2.0	2.5
Max. Charge/Discharge Current (A)	25	40	50	63
Battery Normal Voltage (V)	51.2			
Battery Voltage Range (V)	40 - 60			
Battery Type	Li-ion/lead-acid etc.			

AC Grid				
Max Continuous Current (A)	5.0	7.0	10.0	12.0
Max Continuous Power (kVA)	1.0	1.5	2.0	2.5
Nominal Grid Current(A)	4.6 / 4.4	6.9 / 6.6	9.1 / 8.7	11.4 / 10.9
Nominal Grid Voltage (V)	198 to 242 @ 220 / 207 to 253 @ 230			
Nominal Grid Frequency (Hz)	50 / 60			
Power Factor	0.999 (Adjustable from 0.8 overexcited to 0.8 underexcited)			
Current THD (%)	< 3			

AC Load Output	AF1K-SL-0	AF1.5K-SL-0	AF2K-SL-0	AF2.5K-SL-0
Max Continuous Current (A)	5.0	7.0	10.0	12.0
Max Continuous Power (kVA)	1.0	1.5	2.0	2.5
Max Peak Current (A) (10min)	6.9 / 6.6	10.5 / 10.0	13.7 / 13.1	17.1 / 16.4
Max Peak Power (kVA) (10min)	1.5	2.3	3.0	3.75
Nominal AC Current (A)	4.6 / 4.4	6.9 / 6.6	9.1 / 8.7	11.4 / 10.9
Nominal AC Voltage L-N (V)	220 / 230			
Nominal AC Frequency (Hz)	50 / 60			
Switching Time (s)	Seamless			
Voltage THD (%)	< 3			

Efficiency				
Max. Efficiency (%)	97.6			
Bat. between AC Efficiency (%)	96.8			

Protection	AF1K-SL-0	AF1.5K-SL-0	AF2K-SL-0	AF2.5K-SL-0
Over Current/Voltage Protection	Yes			
Anti-Islanding Protection	Yes			
AC Short Circuit Protection	Yes			
Residual Current Detection	Yes			
Ground Fault Monitoring	Yes			
Insulation Resister Detection	Yes			
Enclosure Protect Level	IP65 / NEMA4X			

General Data	AF1K-SL-0	AF1.5K-SL-0	AF2K-SL-0	AF2.5K-SL-0
Dimensions (L x W x H, mm)	513 x 370 x 192			
Weight	17			
Topology	Tranformer			
Cooling	Intelligent Fan			
Relatively Humidity	0 - 100 %			
Operating Temperature Range (°C)	- 25 to 60			
Operating Altitude (m)	< 4000			
Noise Emission (dB)	< 25			
Standby Consumption (W)	< 10			
Mounting	Wall Bracket			
Communication with RSD	SUNSPEC			
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G			
Certification & Approvals	NRS97, G98/G99, EN50549-1, C10/C11, AS 4777, VDE-AR-N4105, VDE0126, IEC62040, IEC62109-1, IEC62109-2			
EMC	EN61000-6-2, EN61000-6-3			

Battery	AF3K-SL-0	AF3.6K-SL-0	AF4K-SL-0	AF4.6K-SL-0
Max. Charge/Discharge Power (kW)	3.0	3.6	4.0	4.6
Max. Charge/Discharge Current (A)	80	80	80	80
Battery Normal Voltage (V)	51.2			
Battery Voltage Range (V)	40 - 60			
Battery Type	Li-ion/lead-acid etc.			

AC Grid				
Max Continuous Current (A)	14.0	17.0	19.0	22.0
Max Continuous Power (kVA)	3.0	3.6	4.0	4.6
Nominal Grid Current (A)	13.7 / 13.1	16.4 / 15.7	18.2 / 17.4	21.0 / 20.0
Nominal Grid Voltage (V)	198 to 242 @ 220 / 207 to 253 @ 230			
Nominal Grid Frequency (Hz)	50 / 60			
Power Factor	0.999 (Adjustable from 0.8 overexcited to 0.8 underexcited)			
Current THD (%)	< 3			

AC Load Output	AF3K-SL-0	AF3.6K-SL-0	AF4K-SL-0	AF4.6K-SL-0
Max Continuous Current (A)	14.0	17.0	19.0	22.0
Max Continuous Power (kVA)	3.0	3.6	4.0	4.6
Max Peak Current (A) (10min)	20.5 / 19.6	24.6 / 23.5	27.3 / 26.1	31.4 / 30.0
Max Peak Power (kVA) (10min)	4.5	5.4	6.0	6.9
Nominal AC Current (A)	13.7 / 13.1	16.4 / 15.7	18.2 / 17.4	21.0 / 20.0
Nominal AC Voltage L-N (V)	220 / 230			
Nominal AC Frequency (Hz)	50 / 60			
Switching Time (s)	Seamless			
Voltage THD (%)	< 3			

Efficiency				
Max. Efficiency (%)	97.6			
Bat. between AC Efficiency (%)	96.8			

Protection	AF3K-SL-0	AF3.6K-SL-0	AF4K-SL-0	AF4.6K-SL-0
Over Current/Voltage Protection	Yes			
Anti-Islanding Protection	Yes			
AC Short Circuit Protection	Yes			
Residual Current Detection	Yes			
Ground Fault Monitoring	Yes			
Insulation Resister Detection	Yes			
Enclosure Protect Level	IP65 / NEMA4X			

General Data	AF3K-SL-0	AF3.6K-SL-0	AF4K-SL-0	AF4.6K-SL-0
Dimensions (L x W x H, mm)	513 x 370 x 192			
Weight	17			
Topology	Tranformer			
Cooling	Intelligent Fan			
Relatively Humidity	0 - 100 %			
Operating Temperature Range (°C)	- 25 to 60			
Operating Altitude (m)	< 4000			
Noise Emission (dB)	< 25			
Standby Consumption (W)	< 10			
Mounting	Wall Bracket			
Communication with RSD	SUNSPEC			
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G			
Certification & Approvals	NRS97, G98/G99, EN50549-1, C10/C11, AS 4777, VDE-AR-N4105, VDE0126, IEC62040, IEC62109-1, IEC62109-2			
EMC	EN61000-6-2, EN61000-6-3			

# Split Phase Hybrid Inverter

3-9.6 kW




The Afore AF Series storage Inverters are designed to increase energy independence for homeowners. The power range is from 3.0kW to 9.6kW, compatible with high voltage (80-495V) batteries.

Energy management is based on time-of-use and demand charge rate structures, significantly reduce the amount of energy purchased from public grid.



Thanks for the UPS function (switch time < 10ms), enables the crucial loads power on during outages. Additionally, under the backup operation mode, the inverter provides you up to 150% peak output overloading.

The AF Series storage inverters meet the US safety regulations, integrated with Arc Fault Circuit Interrupter (AFCI) and Rapid Shutdown.

## For New Storage System:

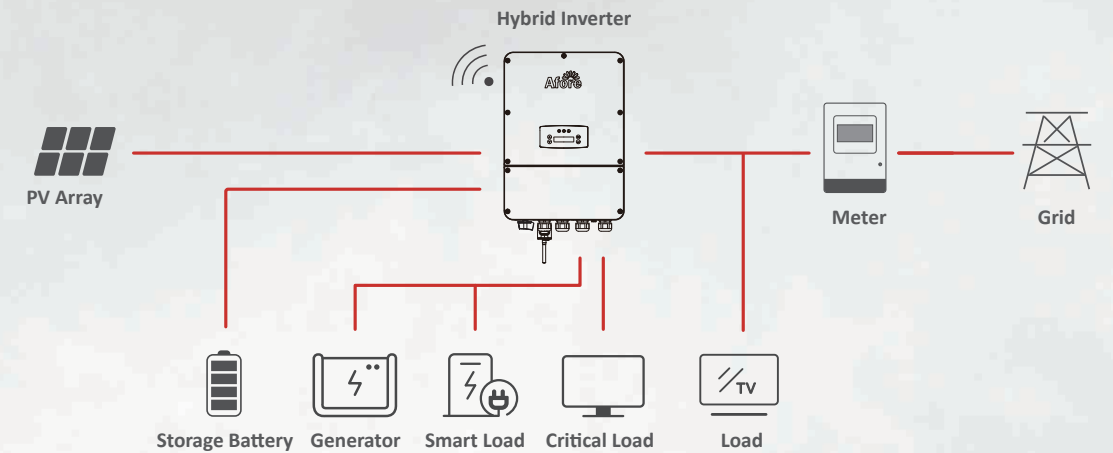


## Optimizing Self-Consumption (on-grid) + Emergency Power Supply(off-grid)

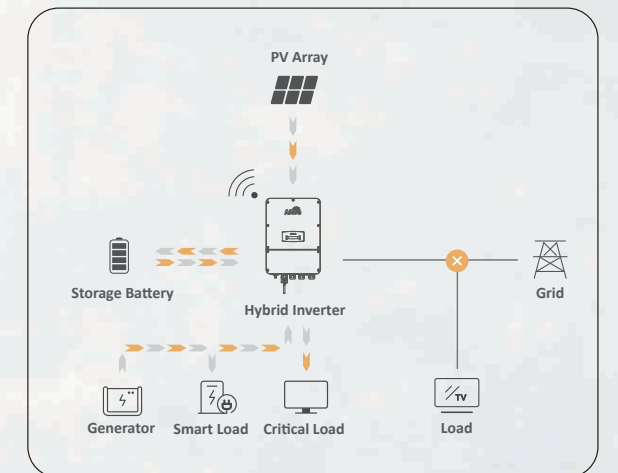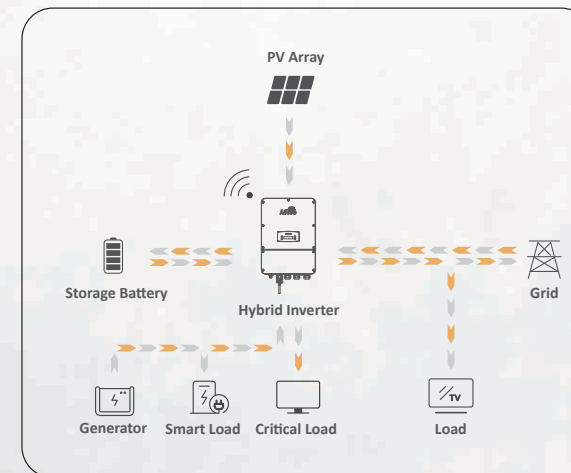

## Optimizing Self-Consumption Mode

With home energy storage installed, home owners may also be able to change from a flat rate electricity tariff to a time-of-use tariff. For the areas and regions, where peak shaving can be applied.

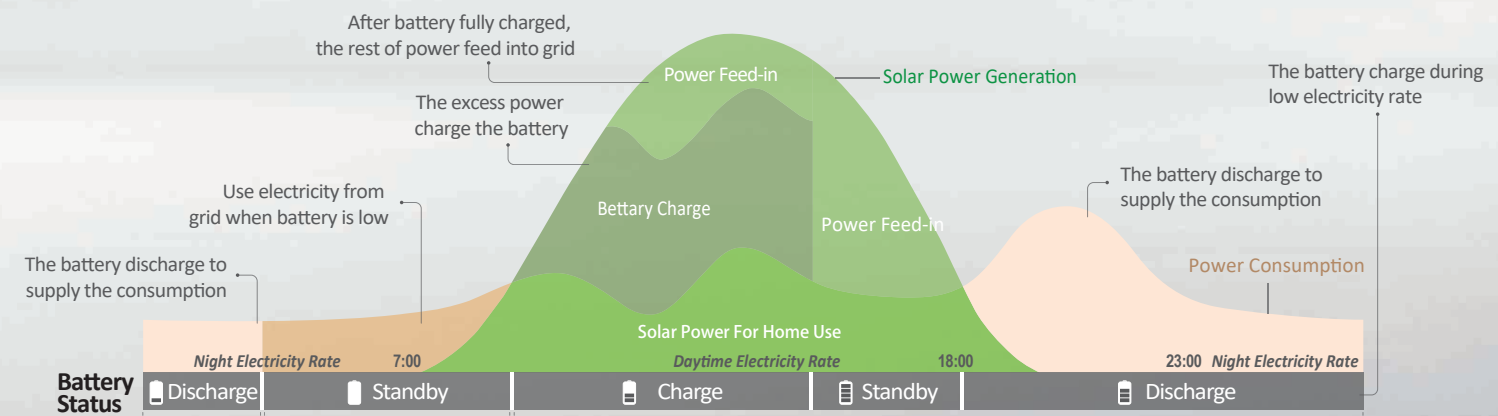

Max. 1.5

**PV OVERSIZE**  
1.5 Times PV Oversize

3 MPPT

**MPPT CHANNELS**  
Up to 3 MPPT Channels

<10 ms

**UPS FUNCTION**  
Switch Time < 10ms



**PARALLEL**  
Max.6 Parallel Stacking



**INPUT**  
Support Generator



**SPLIT-PHASE**  
Support Split-phase (120/240Vac) Grid

Support for Time-of-use Optimization

Configurable Operation Modes

AFCI & Rapid Shutdown Ready

Build in Anti-feed-in Function

Compact Size and Easy Installation

Smart Monitoring & Remote Firmware Upgrade

PV Input	AF3K-DH	AF3.6K-DH	AF4K-DH	AF4.6K-DH	AF5K-DH	AF5.5K-DH
Max. Input Power (kW)	4.5	5.4	6.0	6.9	7.5	8.3
Max. PV Voltage (V)	600					
MPPT Range (V)	80 - 550					
Normal Voltage (V)	360					
Startup Voltage (V)	100					
Max. Input Current (A)	15.5 x 2					
Max. Short Current (A)	26.0 x 2					
No. of MPP Tracker / No. of PV String	2 / 2					
Battery						
Max. Charge/Discharge Power (kW)	4.5 / 4.5	5.4 / 5.4	6.0 / 6.0	6.9 / 6.9	7.5 / 7.5	8.3 / 8.3
Max. Charge/Discharge Current (A)	50					
Battery Normal Voltage (V)	230					
Battery Voltage Range (V)	80 - 495					
Battery Type	Li-ion / Lead-acid					
AC Grid						
Max. Continuous Power (kVA)	3.0	3.6	4.0	4.6	5.0	5.5
Max. Continuous Current (A)	12.5 / 14.5	15.0 / 17.5	17.0 / 19.5	19.5 / 22.5	21.0 / 24	23.0 / 26.5
Nominal Grid Voltage (V)	211 to 264 @ 240 / 183 to 229 @ 208					
Nominal Grid Frequency (Hz)	60					
Output Power Factor	1 default (adjustable from 0.8 leading to 0.8 lagging)					
Current THD (%)	< 3					
Gen Input&AC Back-up	AF3K-DH	AF3.6K-DH	AF4K-DH	AF4.6K-DH	AF5K-DH	AF5.5K-DH
Max. Continuous Current (A)	12.5 / 14.5	15.0 / 17.5	17.0 / 19.5	19.5 / 22.5	21.0 / 24.0	23.0 / 26.5
Max. Continuous Power (kVA)	3.0	3.6	4.0	4.6	5.0	5.5
Max. Peak Current (A) (10min)	18.8 / 21.7	22.5 / 26.0	25 / 28.9	28.8 / 33.2	31.3 / 36.1	34.6 / 39.9
Max. Peak Power (kVA) (10min)	4.5 / 4.5	5.4 / 5.4	6.0 / 6.0	6.9 / 6.9	7.5 / 7.5	8.3 / 8.3
Nominal AC Voltage L-L (V)	240 / 208					
Nominal AC Voltage L-O (V)	120 / 104					
Nominal AC Frequency L-O (Hz)	60					
Switching Time (ms)	< 10					
Voltage THD (%)	< 3					
Efficiency						
CEC Efficiency (%)	97.0					
Max. Efficiency (%)	97.6					
PV to Bat. Efficiency (%)	98.1					
Bat. between AC Efficiency (%)	96.8					
Protection	AF3K-DH	AF3.6K-DH	AF4K-DH	AF4.6K-DH	AF5K-DH	AF5.5K-DH
PV Reverse Polarity Protection	Yes					
Bat. Reverse Polarity Protection	Yes					
Over Current/Voltage Protection	Yes					
Anti-Islanding Protection	Yes					
AC Short Circuit Protection	Yes					
Residual Current Detection	Yes					
Ground Fault Monitoring	Yes					
Insulation Resister Detection	Yes					
PV Arc Detection	Yes					
Rapid Shut Down	Yes					
Protection Degree	IP65 / NEMA4X					
General Data	AF3K-DH	AF3.6K-DH	AF4K-DH	AF4.6K-DH	AF5K-DH	AF5.5K-DH
Dimensions (H x W x D)	560 x 400 x 229 mm / 22.0 x 15.7 x 9.0 in					
Weight	25 kgs / 55 lbs					
Topology	Transformerless					
Cooling	Natural Convection					
Relatively Humidity	0 - 100 %					
Operating Temperature Range	- 25 to 60 °C / - 77 to 140 °F					
Operating Altitude	< 4000 m / < 13123 ft					
Noise Emission (dB)	< 25					
Standby Consumption (W)	< 10					
Mounting	Wall Bracket					
Communication with RSD	SUNSPEC					
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, 4G					
Certification & Approvals	UL 1741 SA, UL 1741, UL1699B, UL 1998, IEEEE1547, IEEEE1547A, IEEEE1547.1, CSA 22.2 No.107, Rule21, HECO Rule 14					
EMC	FCC part15 CLASS B					

PV Input	AF6K-DH	AF7K-DH	AF7.6K-DH	AF8K-DH	AF8.6K-DH	AF9.6K-DH
Max. Input Power (kW)	9.0	10.5	11.4	12.0	12.9	15.0
Max. PV Voltage (V)	600					
MPPT Range (V)	80 - 550					
Normal Voltage (V)	360					
Startup Voltage (V)	100					
Max. Input Current (A)	15.5 x 2	15.5 x 3				
Max. Short Current (A)	26.0 x 2	26.0 x 3				
No. of MPP Tracker / No. of PV String	2 / 2	3 / 3				
Battery						
Max. Charge/Discharge Power (kW)	9.0 / 9.0	10.5 / 10.3	11.4 / 10.3	11.5 / 10.3	11.5 / 10.3	11.5 / 10.3
Max. Charge/Discharge Current (A)	50					
Battery Normal Voltage (V)	230					
Battery Voltage Range (V)	80 - 495					
Battery Type	Li-ion / Lead-acid					
AC Grid						
Max. Continuous Power (kVA)	6.0	7.0	7.6	8.0	8.6	9.6
Max. Continuous Current (A)	25.0 / 29.0	29.5 / 34.0	32.0 / 36.5	33.5 / 38.5	36.0 / 41.5	40.0 / 46.5
Nominal Grid Voltage (V)	211 to 264 @ 240 / 183 to 229 @ 208					
Nominal Grid Frequency (Hz)	60					
Output Power Factor	1 default (adjustable from 0.8 leading to 0.8 lagging)					
Current THD (%)	< 3					
Gen Input&AC Back-up	AF6K-DH	AF7K-DH	AF7.6K-DH	AF8K-DH	AF8.6K-DH	AF9.6K-DH
Max. Continuous Current (A)	25.0 / 29.0	29.5 / 34.0	32.0 / 36.5	33.5 / 38.5	36.0 / 41.5	40.0 / 46.5
Max. Continuous Power (kVA)	6.0	7.0	7.6	8.0	8.6	9.6
Max. Peak Current (A) (10min)	37.5 / 43.3	43.8 / 49.5	47.5 / 49.5	47.9 / 49.5	47.9 / 49.5	47.9 / 49.5
Max. Peak Power (kVA) (10min)	9.0 / 9.0	10.5 / 10.3	11.4 / 10.3	11.5 / 10.3	11.5 / 10.3	11.5 / 10.3
Nominal AC Voltage L-L (V)	240 / 208					
Nominal AC Voltage L-O (V)	120 / 104					
Nominal AC Frequency L-O (Hz)	60					
Switching Time (ms)	< 10					
Voltage THD (%)	< 3					
Efficiency						
CEC Efficiency (%)	97.0					
Max. Efficiency (%)	97.6					
PV to Bat. Efficiency (%)	98.1					
Bat. between AC Efficiency (%)	96.8					
Protection	AF6K-DH	AF7K-DH	AF7.6K-DH	AF8K-DH	AF8.6K-DH	AF9.6K-DH
PV Reverse Polarity Protection	Yes					
Bat. Reverse Polarity Protection	Yes					
Over Current/Voltage Protection	Yes					
Anti-Islanding Protection	Yes					
AC Short Circuit Protection	Yes					
Residual Current Detection	Yes					
Ground Fault Monitoring	Yes					
Insulation Resister Detection	Yes					
PV Arc Detection	Yes					
Rapid Shut Down	Yes					
Protection Degree	IP65 / NEMA4X					
General Data	AF6K-DH	AF7K-DH	AF7.6K-DH	AF8K-DH	AF8.6K-DH	AF9.6K-DH
Dimensions (H x W x D)	560 x 400 x 229 mm / 22.0 x 15.7 x 9.0 in					
Weight	25 kgs / 55 lbs					
Topology	Transformerless					
Cooling	Natural Convection	Intelligent Fan				
Relatively Humidity	0 - 100 %					
Operating Temperature Range	- 25 to 60 °C / - 77 to 140 °F					
Operating Altitude	< 4000 m / < 13123 ft					
Noise Emission (dB)	< 25	< 40				
Standby Consumption (W)	< 10					
Mounting	Wall Bracket					
Communication with RSD	SUNSPEC					
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, 4G					
Certification & Approvals	UL 1741 SA, UL 1741, UL1699B, UL 1998, IEEEE1547, IEEEE1547A, IEEEE1547.1, CSA 22.2 No.107, Rule21, HECO Rule 14					
EMC	FCC part15 CLASS B					

# Monitoring Device & Solution



Failure alarm



PV sytem  
information push



Multiple systems  
in one account



Cloud data  
synchronization




PC browser  
Android and IOS



Real-time/ Historical  
data monitoring and  
analysis



System Income  
Calculation




Wi-Fi / Ethernet / GPRS Data Sticker



Power Plant Data Logger




Zero injection Smart Meter(optional)



Weather Station

# PV System Monitoring Solution

## Single Inverter Monitoring Solution

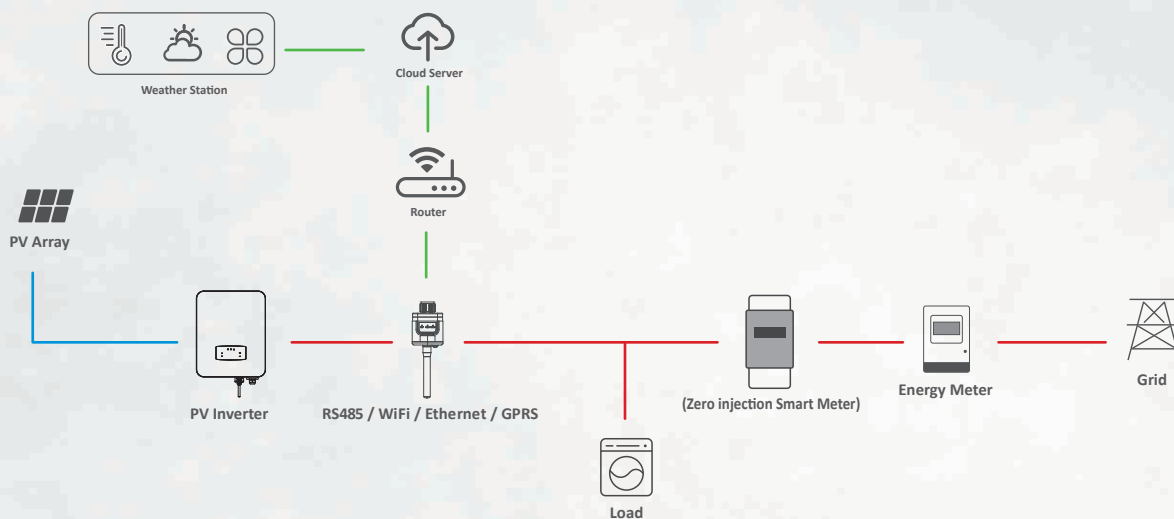

## Multiply Inverters Monitoring Solution

