

STRAIGHT COMPACT WI-FI SMA ANTENNA




Technical data


Frequency range	2400 ~ 2500 MHz, 5150 ~ 5850 MHz, 5925 ~ 7125 MHz
Polarization	Linear
Radiation pattern type	Omni-directional
Gain	≤ 4.3 dBi
VSWR	≤ 2.4
Efficiency	≤ 62.5%
Impedance	50 Ω
Connector type	RP-SMA Male
Weight	5,1 g
Operating temperature	-40 °C ~ +85 °C
Ingress protection rating	IP53

Radiation patterns

ELEVATION

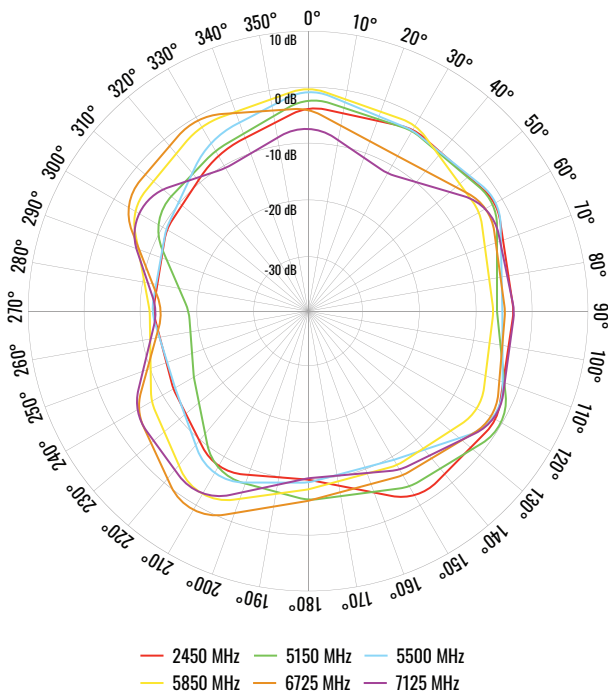

AZIMUTH

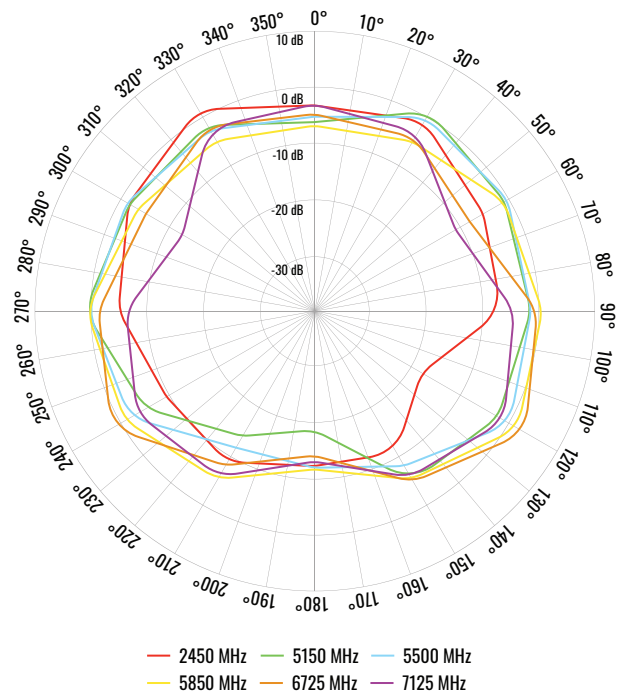

Spatial measurements

