

ANGLED COMPACT WI-FI SMA ANTENNA




Mechanical/Environmental


Frequency range	2400~2500, 5150~5850, 5925~7125 MHz
Polarization	Linear
Radiation pattern type	Omni-directional
Gain	≤ 2.2 dBi
V.S.W.R	≤ 6.4
Efficiency	≤ 66.9 %
Impedance	50 Ω
Connector type	RP-SMA Male
Weight	7.4 g
Operating temperature	-40 °C to +85 °C
Ingress Protection Rating	IP53
RoHS compliant	✓

Radiation patterns

ELEVATION

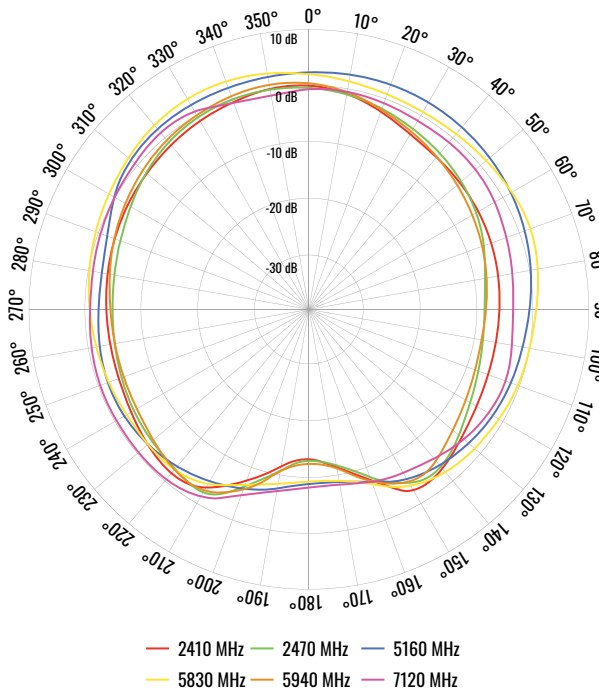

AZIMUTH

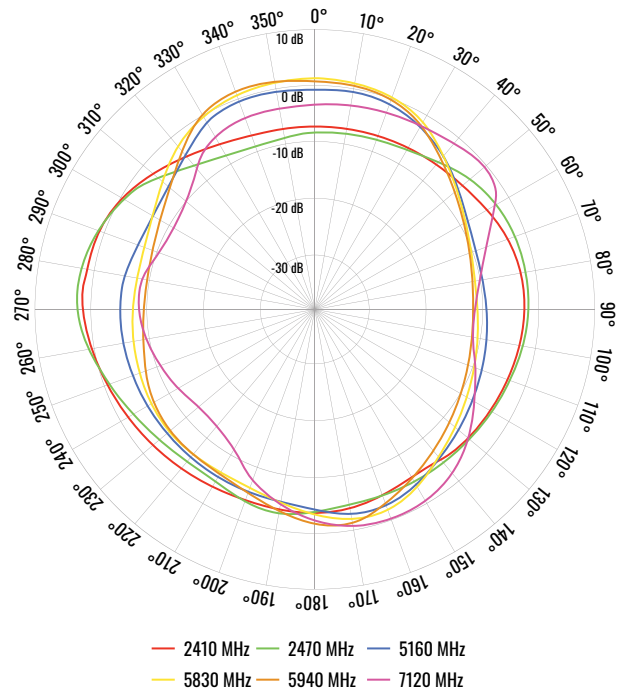

Spatial measurements

