

AX3000 Whole Home Mesh Wi-Fi System

Model: Halo H80X




// Highlights

- 3000 Mbps Dual Band Wi-Fi‡
- Seamless Roaming with One Wi-Fi Name†
- Connect over 150 Devices‡
- 3× Gigabit WAN/LAN Ports
- Easy App Control



Fast Wi-Fi 6 for an Upgraded Whole Home Mesh Network Experience

Armed with Wi-Fi 6, Halo H80X improves virtually every aspect of your network, especially when it comes to speed, efficiency, and capacity. [△]

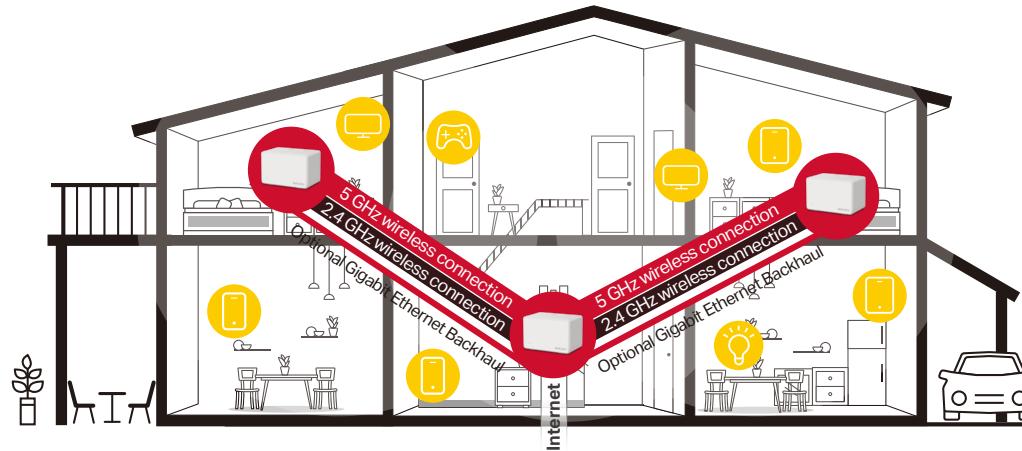

Whole Home Coverage

Eliminate weak signal areas with clearer, stronger whole home Wi-Fi.[△]



Seamless Roaming

Choose the best signal and enjoy the best connections.[†]



One Unified Network

Run a single home network with one Wi-Fi name and password.



Parental Controls

Set access control and time limits to better manage your family's online habits.



Quality of Service (QoS)

Prioritize select devices to perform better.



Connects over 150 Devices

Halo keeps your phones, computers, and all IoT devices connected simultaneously.[‡]

// Specifications

Wireless

Wireless Standards

IEEE 802.11 a/n/ac/ax 5 GHz,

IEEE 802.11 b/g/n/ax 2.4 GHz

Signal Rate

2402 Mbps on 5 GHz, 574 Mbps on 2.4 GHz

Mesh protocol802.11k/v/r[†]**Transmission Power**

2.4 GHz < 20dBm (EIRP)

5 GHz < 23dBm (EIRP)

Reception Sensitivity

2.4GHz:

11g 6Mbps: -96.5dBm

11g 54Mbps: -78dBm

11AX HE20 MCS0: -96.5dBm

11AX HE20 MCS11: -65dBm

11AX HE40 MCS0: -93.5dBm

11AX HE40 MCS11: -63dBm

5GHz:

11a 6Mbps: -96dBm

11a 54Mbps: -78dBm

11ac VHT20 MCS8: -74.5dBm

11ac VHT40 MCS9: -70.5dBm

11ac VHT80 MCS9: -66.5dBm

11AX HE20 MCS11: -66dBm

11AX HE40 MCS11: -63dBm

11AX HE80 MCS11: -61dBm

Software

Working Mode

Router, Access Point

WAN Type

Dynamic IP/Static IP/PPPoE/L2TP/PPTP

DHCP

Server, Client

Protocols

Supports IPv4 and IPv6

Guest Network

2.4 GHz Guest Network,

5 GHz Guest Network

Features

Parental Controls, QoS (Quality of Service),

Monthly Report Assisted Setup, Address

Reservation, Port Forwarding, Mercusys DDNS,

VLAN, IPv6, LED Control, Agile Config, TR-069

Management

Local Management, Remote Management,

Multi-Managers

Wireless Security

WPA-PSK/WPA2-PSK/WPA3

// Specifications

Hardware

Ports
3× 1 Gbps Ports per Halo unit (WAN/LAN auto-sensing)
Button
Reset button
Dimensions (W x D x H)
128 × 81 × 83.7 mm (5 × 3.2 × 3.3 in)

Others

Environment
Operating Temperature: 0°C~40°C (32°F~104°F)
Operating Humidity: 10%~90% Non-Condensing
Storage Humidity: 5%~90% Non-Condensing
Package Contents for Halo H80X (1-pack):
1× Halo H80X Unit
1× RJ45 Ethernet Cable
1× Power Adapter
1× Quick Installation Guide
Package Contents for Halo H80X (2-pack):
2× Halo H80X Units
1× RJ45 Ethernet Cable
2× Power Adapters
1× Quick Installation Guide

Package Contents for Halo H80X (3-pack):
3× Halo H80X Units
1× RJ45 Ethernet Cable
3× Power Adapters
1× Quick Installation Guide

Specifications are subject to change without notice. MERCUSYS is a registered trademark of MERCUSYS TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2025 MERCUSYS TECHNOLOGIES CO., LTD. All rights reserved.

†Seamless roaming requires clients to support 802.11k/v/r and may require additional setup. Performance may vary depending on the client device.

‡Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput, wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

△Use of Wi-Fi 6 and other features including OFDMA, MU-MIMO, 1024-QAM, HE160, BSS Color require clients to also support the corresponding features. The 160 MHz bandwidth may be unavailable in the 5 GHz band in some regions/countries due to regulatory restrictions.

This product may not support all the mandatory features of IEEE 802.11AX specifications. Further software upgrades for feature availability may be required.

§Use of WPA3 requires clients to also support WPA3.

*Please note that the Halo H series and S series cannot work together. Halo H80X is compatible with other units from the Halo H series to form a Mesh network.

**All WAN/LAN ports will operate as either WAN or LAN ports. Only one port can serve as a WAN port at a time.