

Fiber XGS

UISP-FIBER-XGS

Mechanical

Dimensions	100 x 100 x 27 mm (3.9 x 3.9 x 1.1")
Weight	220 g (0.49 lb)
Enclosure material	UV-stabilized polycarbonate

Hardware

Networking interface	(1) SC/APC, ITU-G.9807 XGSPON WAN port(1) 100/1,000/2,500/5,000/10,000 MbE RJ45 LAN ports
Management interface	Ethernet in-bandPON
Memory	256 MB DDR
Onboard flash storage	32 MB NOR
Max. power consumption	8W
Power method	USB-C 5V DC, 3A
Power supply	5V DC, 3A power adapter
Supported voltage range	5V DC power adapter
Total non-blocking line rate	Downstream: 9.95 Gbit/sUpstream: 9.95 Gbit/s
Normal TX range of optical module	4 to 9dBm
Normal RX range of optical module	-9 to -26dBm
Button	(1) Factory reset
Ambient operating temperature	-15 to 45° C (5 to 113° F)
Ambient operating humidity	10 to 95% non-condensing
Certifications	CE, FCC, IC

Fiber


Operating wavelength	TX: 1,270nmRX: 1,577nm
Line code	Scrambled NRZ
Physical reach	20 km

LEDs

Power	White: ON
Ethernet	Steady white: link up Blinking white: activity OFF: link down
PON status	(3) signal LEDs All-OFF: bootup 1x orange: signal too low (< -27 dbm) 1x white: signal low (>= -27 dbm) 2x white: signal good (>= -24 dbm) 3x white: signal strong (>= -12 dbm) 1x orange + 2x white: signal too strong (>= -9 dbm) 3x orange: no signal LEDs alternate between orange + white + orange and a signal strength indicator: no authority

Software

Management application	UISP: Version 1.5.7 and later
------------------------	-------------------------------

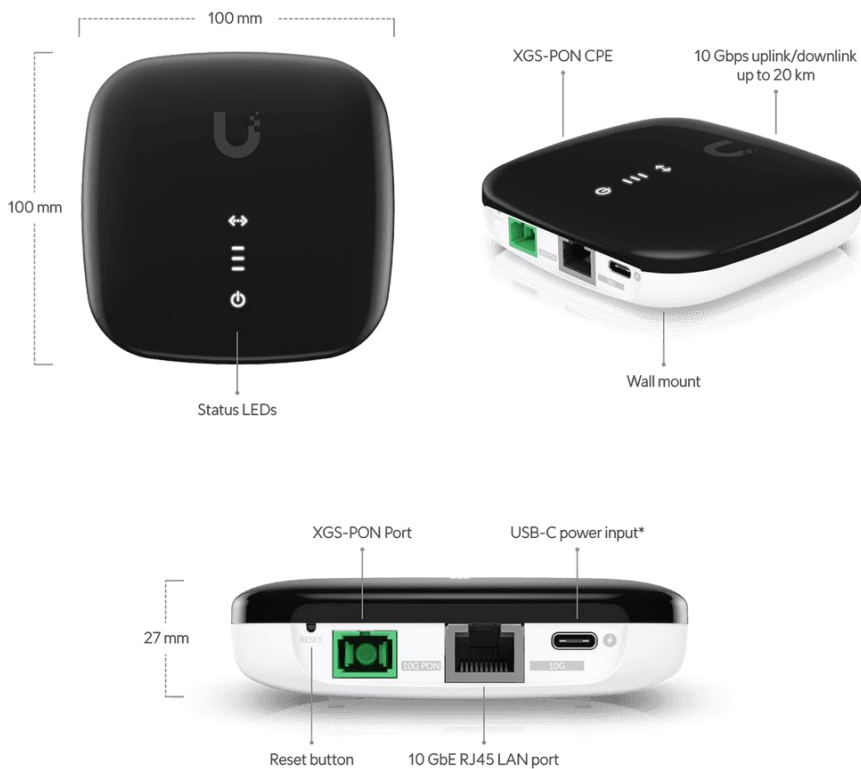

*USB-C 5V DC, 3A adapter included.