

Mechanical

Dimensions	289 x 280 x 52 mm (11.38 x 11.02 x 2.05")
Weight	1.4 kg (3.1 lb)
Enclosure materials	Polycarbonate, acrylonitrile butadiene styrene

Hardware

Networking interface	(1) 10/100 MbE RJ45 LAN port
Management interface	Ethernet In-bandBluetooth
Power TransPort output	27V DC, 100W (with 1 power adapter)27V DC, 200W (with 2 power adapters)
Power method	(2) 27V DC, 4.4A power adapters (120W Power TransPort Adapter not included)
Backup power	(1) 25.2V DC, 7.93A rechargeable Li-ion battery pack (included)(1) 24V DC, 8.33A lead acid battery input* (battery not included)*Connect to a lead-acid battery only. Using another battery type could be hazardous.
Max. power consumption	3W (excludes Power TransPort output and battery charger)
ESD/EMP protection	Air: ± 15 kV, contact: ± 8 kV
Ambient operating temperature	-5 to 40° C (23 to 104° F)
Ambient operating humidity	5 to 95% non-condensing
Certifications	CE, FCC, IC

LEDs

System	Status
RJ45 data port	Link/activity
Power TransPort	On/Off

Compatibility


Supported models

UISP Console
 UISP Router (installed with UISP Box)
 UISP Router Pro
 UISP Switch (installed with UISP Box)
 UISP Switch Pro

Software

Management application

UISP: Version 1.4.5 and later

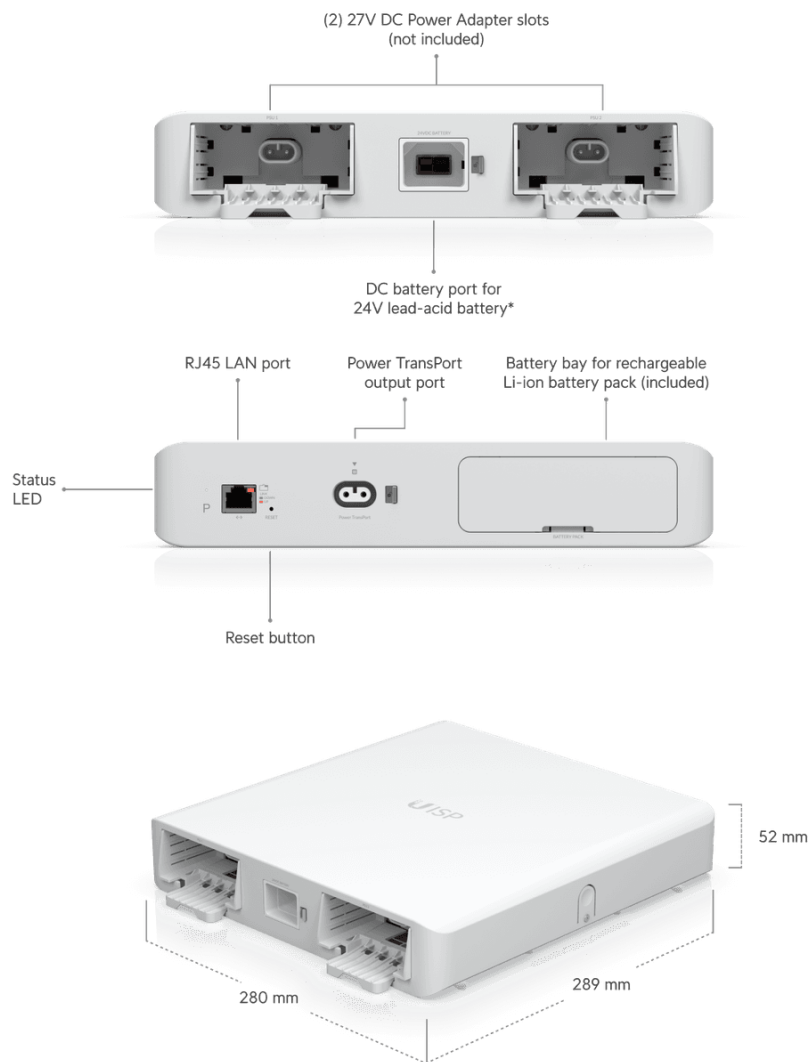

*Connect to a lead-acid battery only. Using another battery type could be hazardous.