

Pro Max 48 PoE

USW-Pro-Max-48-PoE

Mechanical

Dimensions	442.4 x 400 x 44 mm (17.4 x 15.7 x 1.7")
Weight	Without mounting brackets: 6.2 kg (13.7 lb)With mounting brackets: 6.3 kg (13.9 lb)
Enclosure material	SGCC steel

Hardware

Management interface	Ethernet In-Band
Networking interface	(32) GbE RJ45 ports(16) 1/2.5 GbE RJ45 ports(4) 10G SFP+ ports
PoE interface	(32) PoE/PoE+ (Pins 1, 2+; 3, 6-)(16) 60W PoE++ (Pair A 1, 2+; 3, 6-) (Pair B 4, 5+; 7, 8-)
Total non-blocking throughput	112 Gbps
Switching capacity	224 Gbps
Forwarding rate	166.656 Mpps
Power method	(1) Universal input, 100—240V AC, 50/60 Hz(1) USP-RPS DC input
Power supply	AC/DC, internal, 820W
Supported voltage range	100—240V AC
Max. power consumption	100W (Excluding PoE output)
Total available PoE	720W
Max. PoE wattage per port by PSE	PoE: 15.4WPoE+: 30WPoE++: 60W
Voltage range PoE mode	PoE: 44—57VPoE+: 50—57V
LCM display	(1) 1.3" touchscreen
Button	Factory reset
Ambient operating temperature	-5 to 40° C (23 to 104° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

Switching Features

Layer 2 features

IGMP snooping
STP / RSTP with priorities and port-level disable
Port isolation
Storm control
Voice VLAN
Port mirroring
LACP port aggregation
Multicast / broadcast rate limiting
MAC address blocking
Flow control
802.1X control
Jumbo frames
Proprietary loop protection
DHCP snooping / guarding
Egress rate limit
LLDP-MED
Port restricted by MAC
Device isolation with ACLs

Layer 3 features

DHCP for locally-managed networks
DHCP relay
Inter-VLAN routing between networks on same switch
Static routing between local networks
Network isolation with ACLs

Etherlighting™

Ethernet

Locating
Speed/link
Native VLAN/network

SFP+

Locating
Speed/link
Native VLAN/network

LEDs

System

Status



RPS

Status

Application Requirements

UniFi Network

Version 8.0.24 and later

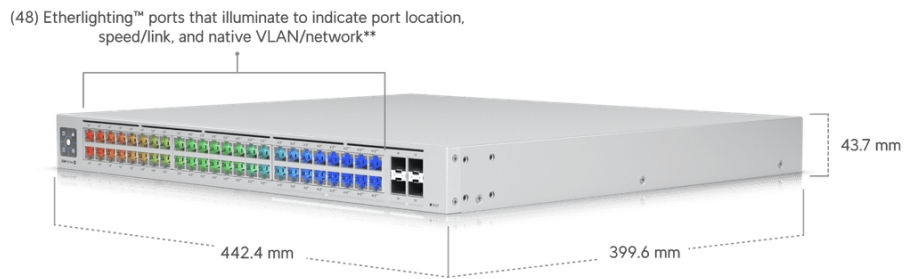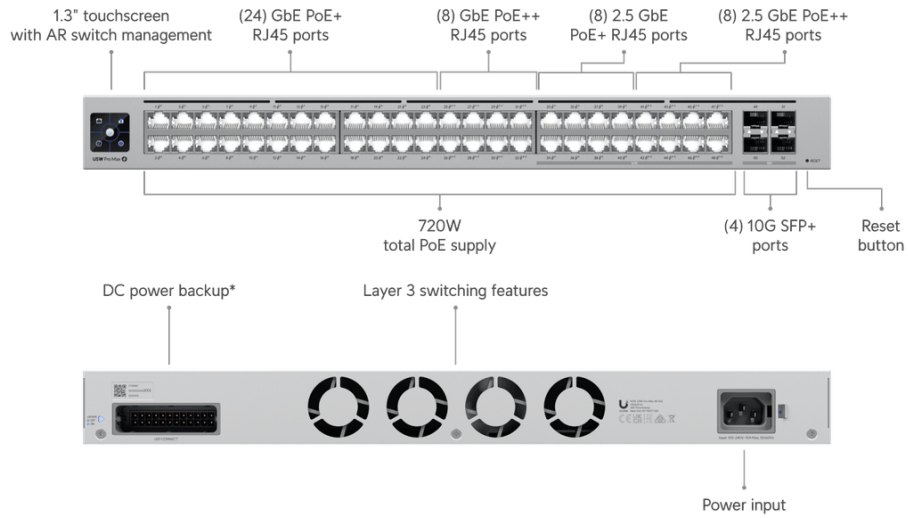

*Require UniFi Power Backup.
 **Pair with UniFi Etherlighting Patch Cables for optimal brightness.

